arXiv:0712.0103v1 [quant-ph] 2 Dec 2007

A Construction of Quantum Stabilizer Codes Based on Syndrome Assignment by Classical Parity-Check Matrices

Ching-Yi Lai and Chung-Chin Lu *

December 1, 2007

Abstract

In quantum coding theory, stabilizer codes are probably the most important class of quantum codes. They are regarded as the quantum analogue of the classical linear codes and the properties of stabilizer codes have been carefully studied in the literature. In this paper, a new but simple construction of stabilizer codes is proposed based on syndrome assignment by classical parity-check matrices. This method reduces the construction of quantum stabilizer codes to the construction of classical parity-check matrices that satisfy a specific commutative condition. The quantum stabilizer codes from this construction have a larger set of correctable error operators than expected. Its (asymptotic) coding efficiency is comparable to that of CSS codes. A class of quantum Reed-Muller codes is constructed, which have a larger set of correctable error operators than that of the quantum Reed-Muller codes developed previously in the literature. Quantum stabilizer codes inspired by classical quadratic residue codes are also constructed and some of which are optimal in terms of their coding parameters.

Index terms: Quantum error-correcting codes, quantum stabilizer codes, quantum information theory, Reed-Muller codes, quadratic-residue codes.

1 Introduction

The theory of quantum error correction has been profoundly developed in the last decade since the first quantum error-correcting code proposed by Shor [1]. In [2], using a different approach from that of Shor, Steane gave a new quantum error-correcting code and studied

---

[*] This work was supported by the National Science Council, Taiwan, under Contract NSC96-2628-E-007-006-MY3. The authors are with Department of Electrical Engineering, National Tsing Hua University, Hsinchu 30013, Taiwan. E-mails: cylai@abel.ee.nthu.edu.tw and cclu@ee.nthu.edu.tw. Chung-Chin Lu is the person to correspond with.

basic theory of quantum error correction. Later, Steane gave more new quantum codes and discussed constructions of quantum error-correcting codes in [3]. The complete quantum error correction condition was given in [4, 5, 6]. The optimal five qubit code was discovered in [5, 7]. After CSS code construction [8, 9], the study of quantum error-correcting codes then turned to the study of classical self-orthogonal codes.

The idea of stabilizer codes was proposed in [10, 11] and the properties of stabilizer codes were extensively addressed in [11, 12]. CSS codes can then be viewed as one prominent class of stabilizer codes. In [13], Steane gave a further improvement, called an enlargement of CSS codes, which produces several families of quantum codes with greater minimum distance. In this paper we will propose a new but simple construction of quantum stabilizer codes based on syndrome assignment by classical parity-check matrices and develop several classes of quantum codes from this construction.

This paper is organized as follows. In Section 2, we begin in describing the basic properties of stabilizer codes and end with a new formulation of CSS codes and their enlargement [8, 9, 13]. The method of construction of stabilizer codes based on syndrome assignment by classical parity-check matrices is proposed in Section 3, where we discuss the asymptotic coding efficiency of this method. As an illustration, we develop a family of quantum stabilizer codes from classical Reed-Muller codes in Section 4. Several other quantum codes inspired by classical quadratic residue codes are investigated in Section 5, where several optimal quantum codes are constructed. A conclusion is discussed in the last section.

2 Stabilizer Codes

2.1 Stabilizer Groups and Stabilizer Codes

Let $\mathcal{H}$ be the state space of a qubit. The Pauli group $\mathcal{G}_n$, acting on the state space $\mathcal{H}^{\otimes n}$ of n qubits, plays an important role in the construction of n-qubit stabilizer codes. An element in $\mathcal{G}_n$ is expressed as $i^c M_1 \otimes M_2 \otimes \ldots \otimes M_n$, where each M_j is one of the Pauli operators I, X, Y, or Z on $\mathcal{H}$, $i = \sqrt{-1}$, and $c \in \{0, 1, 2, 3\}$. Let $\mathcal{K} = \{\pm I^{\otimes n}, \pm i I^{\otimes n}\}$, which is a normal subgroup of $\mathcal{G}_n$ and will be used in a later discussion.

For a $g \in \mathcal{G}_n$, the fixed subspace $\mathcal{V}(g)$ of g is a subspace of $\mathcal{H}^{\otimes n}$ such that $|\psi\rangle \in \mathcal{V}(g)$ if and only if $g|\psi\rangle = |\psi\rangle$. A stabilizer group $\mathcal{S}$ that fixes a non-trivial subspace $\mathcal{T}$ of $\mathcal{H}^{\otimes n}$ is the set

$$\mathcal{S} = \{g \in \mathcal{G}_n \,|g|\psi\rangle = |\psi\rangle, \ \ \forall |\psi\rangle \in \mathcal{T}\}.$$

A necessary condition is that $-I \notin \mathcal{S}$. Since any $g, h \in \mathcal{G}_n$ have either $gh = hg$ or $gh = -hg$, $\mathcal{S}$ must be an *abelian* subgroup of $\mathcal{G}_n$. And since any $g \in \mathcal{G}_n$ has either $g^2 = I$ or $g^2 = -I$, we have $g^2 = I \ \forall g \in \mathcal{S}$. Therefore, $\mathcal{S} \cong (\mathbb{Z}_2)^r$ for some r, i.e., $\mathcal{S} =< g_1, g_2, \ldots, g_r >$ with r commutative independent generators.

An $[[n, k, d]]$ quantum stabilizer code $\mathcal{C}(\mathcal{S})$ is a 2^k-dimensional subspace of $\mathcal{H}^{\otimes n}$ fixed by a stabilizer group $\mathcal{S}$ with a set of $r = n - k$ independent generators. The d means the minimum distance of the quantum code $\mathcal{C}(\mathcal{S})$ and will be defined later. The error-correction condition for a stabilizer code $\mathcal{C}(\mathcal{S})$ [11, 12, 14] says that $\{E_i\}$ is a collection of correctable error operators in $\mathcal{G}_n$ for $\mathcal{C}(\mathcal{S})$ if and only if

$$E_j^{\dagger} E_k \notin N(\mathcal{S}) \setminus \tilde{\mathcal{S}} \ \forall j, k, \tag{1}$$

where

$$N(\mathcal{S}) = \{g \in \mathcal{G}_n \, \big| g h g^{\dagger} \in \mathcal{S} \ \forall h \in \mathcal{S}\}$$

is the normalizer group of $\mathcal{S}$ in $\mathcal{G}_n$, which in fact is the centralizer group of $\mathcal{S}$ in $\mathcal{G}_n$, and

$$\tilde{\mathcal{S}} = \mathcal{S}\mathcal{K} = \{gh \mid g \in \mathcal{S}, \ h \in \mathcal{K}\}.$$

The weight of an element $i^c M_1 \otimes M_2 \otimes \ldots \otimes M_n$ in $\mathcal{G}_n$ is defined to be the number of M_j's not equal to I. Then the minimum distance d of $\mathcal{C}(\mathcal{S})$, motivated by the above error correction condition, is defined to be the minimum weight of an element in $N(\mathcal{S}) \setminus \tilde{\mathcal{S}}$.

2.2 Binary Codes Corresponding to Stabilizer Groups

The Pauli group $\mathcal{G}_n$ is closely related to the $2n$-dimensional binary vector space $\mathbb{Z}_2^{2n}$. If u, v are two binary n-tuples, (u, v) is meant to be a binary $2n$-tuples and any element $x \in \mathbb{Z}_2^{2n}$ can be written in the form (u, v) with u, v n-tuples. We use uv to denote the n-tuple of the bitwise AND of u and v. That is, $(uv)_i = u_i \cdot v_i$ where the subscript i means the i-th bit of the binary n-tuple. Then we define the generalized weight of an $2n$-tuple $x = (u, v)$ in $\mathbb{Z}_2^{2n}$, denoted by $gw(x)$, as the Hamming weight of the bitwise OR of u and v. Thus

$$gw(x) = w(u) + w(v) - w(uv),$$

where $w(u)$ means the Hamming weight of u, the number of nonzero components of u.

A $g = i^c M_1 \otimes M_2 \otimes \ldots \otimes M_n$ in $\mathcal{G}_n$, can be expressed as $g = i^{c'} X_\alpha Z_\beta$, where $\alpha = (a_1, a_2, \ldots, a_n)$ and $\beta = (b_1, b_2, \ldots, b_n)$ are two binary n-tuples and $c, c' \in \{0, 1, 2, 3\}$. In this expression, if $M_j = I, X, Z, Y$, then $(a_j, b_j) = (0,0), (1,0), (0,1), (1,1)$, respectively. And we have $c' \equiv c + l \pmod 4$ where l is the number of M_j's which are equal to Y (note that $Y = iXZ$). We define a group homomorphism $\tau : \ \mathcal{G}_n \mapsto \mathcal{G}_n / \mathcal{K}$ by

$$\tau(g) \triangleq g\mathcal{K}.$$

If $g = i^c X_\alpha Z_\beta$, $\tau(g) = X_\alpha Z_\beta \ \mathcal{K}$. Note that $X_\alpha Z_\beta \mathcal{K} = X_{\alpha'} Z_{\beta'} \mathcal{K}$ if and only if $\alpha = \alpha'$ and $\beta = \beta'$. Also τ is an epimorphism. Next we define a group isomorphism $\mu : \ \mathcal{G}_n / \mathcal{K} \mapsto \mathbb{Z}_2^{2n}$ by

$$\mu(X_\alpha Z_\beta \mathcal{K}) \triangleq (\alpha, \beta).$$

Then we can define a homomorphism $\varphi : \ \mathcal{G}_n \mapsto \mathbb{Z}_2^{2n}$ by $\varphi = \mu \circ \tau$, i.e.,

$$\varphi(i^c X_\alpha Z_\beta) \triangleq \mu(\tau(i^c X_\alpha Z_\beta)) = \mu(X_\alpha Z_\beta \mathcal{K}) = (\alpha, \beta).$$

It is clear that φ is an epimorphism with kernel $\mathcal{K}$ and $\{g_1, g_2, \ldots, g_r\}$ is a set of independent generators if and only if $\varphi(g_1), \varphi(g_2), \ldots, \varphi(g_r)$ are linearly independent $2n$-tuples in $\mathbb{Z}_2^{2n}$.

Suppose $\{g_1, \ldots, g_r\}$ is a set of independent generators of a stabilizer group $\mathcal{S}$. We define a *check matrix* H of $\mathcal{S}$ by making $\varphi(g_i)$ as its i-th row vector. Then H is an $r \times 2n$ binary matrix. For convenience, we may denote H by

$$H = \left[\begin{array}{c|c} H_X & H_Z \end{array}\right],$$

where H_X, H_Z are two $r \times n$ binary matrices. Note that each of the 2^r sets $\{\pm g_1, \ldots, \pm g_r\}$ can be used as a set of independent generators of a distinct stabilizer group. But all of them have the same check matrix H.

One example of stabilizer codes is a five-qubit code. A set of generators of a $[[5, 1, 3]]$ code can be

$$\begin{aligned} g_1 &= XZZXI, \\ g_2 &= IXZZX, \\ g_3 &= XIXZZ, \\ g_4 &= ZXIXZ. \end{aligned}$$

The corresponding check matrix is

$$\begin{bmatrix} 10010 & 01100 \\ 01001 & 00110 \\ 10100 & 00011 \\ 01010 & 10001 \end{bmatrix}. \tag{2}$$

Since a stabilizer group $\mathcal{S}$ is an abelian group, we have $gh = hg\ \forall g, h \in \mathcal{S}$, which has a corresponding property in $\varphi(\mathcal{S})$, induced by the homomorphism φ, that

$$\varphi(g)\Lambda_{2n}\varphi(h) = 0,\ \forall g, h \in \mathcal{S},$$

where $\Lambda_{2n} = \begin{bmatrix} O_{n\times n} & I_{n\times n} \\ I_{n\times n} & O_{n\times n} \end{bmatrix}$. Thus a check matrix H of a stabilizer group $\mathcal{S}$ has to satisfy the following *commutative condition*,

$$H\Lambda_{2n}H^T = H_X H_Z^T + H_Z H_X^T = O_{r\times r}, \tag{3}$$

where $O_{i\times j}$ is the $i \times j$ zero matrix. We will omit the subscripts of Λ and O in the following discussion. We define that an $r \times 2n$ binary matrix $H = [H_X\, |H_Z]$ is *commutative* if it satisfies the commutative condition. From (3), an $r \times 2n$ binary matrix $H = [H_X\, |H_Z]$ is *commutative* if and only if $H_X H_Z^T$ is a symmetric $r \times r$ matrix.

The check matrix is a convenient tool for the encoding and decoding of stabilizer codes [12]. In addition, the check matrix is able to facilitate the construction of stabilizer groups from known classical binary codes, as will be demonstrated in the next section. Before that, we will illustrate an application of the check matrix of a stabilizer group to determine the minimum distance of the corresponding stabilizer code as follows.

Let $\bar{\mathcal{S}} = \varphi(\mathcal{S})$, which is a subspace of $\mathbb{Z}_2^{2n}$. Then $\bar{\mathcal{S}}$ can be viewed as a classical binary code with generator matrix H. As in [11, 15], we define a symplectic inner product $*$ on $\mathbb{Z}_2^{2n}$ by

$$(u_1, v_1) * (u_2, v_2) \triangleq u_1 \cdot v_2 + v_1 \cdot u_2.$$

Thus, two elements g, h in $\mathcal{G}_n$ is commutative if and only if the symplectic inner product $\varphi(g) * \varphi(h)$ of $\varphi(g)$ and $\varphi(h)$ is zero. Let $\bar{\mathcal{S}}^{\perp *}$ be the dual code of $\bar{\mathcal{S}}$ with respect to the symplectic inner product,

$$\bar{\mathcal{S}}^{\perp *} = \{(u, v) \in \mathbb{Z}_2^{2n} \,\big|\, (u, v) * (\alpha, \beta) = 0,\ \forall (\alpha, \beta) \in \bar{\mathcal{S}}\}.$$

It is clear that $\bar{\mathcal{S}}$ is a self-orthogonal code with respect to this symplectic inner product, i.e., $\bar{\mathcal{S}} \subset \bar{\mathcal{S}}^{\perp *}$. An $(2n - r) \times 2n$ binary matrix

$$G = \left[\begin{array}{c|c} G_X & G_Z \end{array}\right]$$

of rank $2n - r$, where G_X and G_Z are $(2n - r) \times n$ binary matrices, is a generator matrix of $\bar{S}^{\perp *}$ if and only if

$$H \Lambda G^T = H_X G_Z^T + H_Z G_X^T = O. \tag{4}$$

It can be seen that $\bar{\mathcal{S}}^{\perp *} = \varphi(N(\mathcal{S}))$ and the minimum distance of $\mathcal{C}(\mathcal{S})$ is just the minimum generalized weight of a nonzero codeword in $\bar{\mathcal{S}}^{\perp *} \backslash \bar{\mathcal{S}}$. This helps decide the minimum distance of a stabilizer code, as illustrated in the construction of CSS codes [8, 9] and their enlargement [13] as follows.

To construct an $[[n, k, d]]$ CSS code $\mathcal{C}(\mathcal{S})$, we choose a classical $[n, k_1]$ binary code $\mathcal{C}_1$ and an $[n, k_2]$ subcode $\mathcal{C}_2$ of $\mathcal{C}_1$ such that both the code $\mathcal{C}_1$ and the classical dual code of $\mathcal{C}_2$ have minimum distance $\geqslant d$. Then a check matrix of a stabilizer group $\mathcal{S}$ is established as

$$H = \left[\begin{array}{c|c} G_2 & O \\ O & H_1 \end{array}\right],$$

of rank $n - k_1 + k_2$, where G_2 is a generator matrix of $\mathcal{C}_2$ and H_1 is a parity-check matrix of $\mathcal{C}_1$. Let $G_1 = \left[\begin{array}{c} G_2 \\ G_3 \end{array}\right]$, a generator matrix of $\mathcal{C}_1$, and $H_2 = \left[\begin{array}{c} H_1 \\ H_3 \end{array}\right]$, a parity-check matrix of $\mathcal{C}_2$. Then a generator matrix of the symplectic dual code $\bar{S}^{\perp *}$ is

$$G = \left[\begin{array}{c|c} G_2 & O \\ G_3 & O \\ O & H_1 \\ O & H_3 \end{array}\right] = \left[\begin{array}{c|c} G_1 & O \\ O & H_2 \end{array}\right],$$

which is of rank $n + k_1 - k_2$. It can be verified that both (3)and (4) hold. The minimum distance of the quantum code is no less than the minimum generalized weight of the symplectic dual code $\bar{S}^{\perp *}$ and is clearly $\geqslant d$ from the structure of its generator matrix G. The dimension of the quantum code is $k = n - (n - k_1 + k_2) = k_1 - k_2$.

The enlargement of CSS codes in [13] is based on the CSS construction and exchanges code dimension for error-correcting capability. With additional stabilizer generators, this enlargement increases the minimum distance of the code by half. We give an explicit description of the enlargement in terms of nonsingular matrices and a proof that this enlargement is able to increase the minimum distance of the code by half in the following theorem.

Theorem 1. Let $\mathcal{C}_1$ be a classical $[n, k_1, d_1]$ binary code which contains its classical dual $\mathcal{C}_1^{\perp}$. Furthermore, let $\mathcal{C}_1$ be able to be enlarged to $\mathcal{C}_2 = [n, k_2, d_2]$, where $k_2 > k_1$. Suppose that G_1, $G_2 = \begin{pmatrix} G_1 \\ G_3 \end{pmatrix}$ are generator matrices of $\mathcal{C}_1$, $\mathcal{C}_2$,respectively, and H_2, $H_1 = \begin{pmatrix} H_2 \\ H_3 \end{pmatrix}$ are parity-check matrices of $\mathcal{C}_2$, $\mathcal{C}_1$, respectively. If there exists a $(k_2 - k_1) \times (k_2 - k_1)$ nonsingular binary matrix P such that $I + P$ is also nonsingular, by taking

$$H = \left(\begin{array}{c|c} H_2 & O \\ O & H_2 \\ QH_3 & H_3 \end{array} \right),$$

where $Q = \left(H_3 G_3^T\right) \left(P^T\right)^{-1} \left(H_3 G_3^T\right)^{-1}$ is a $(k_2 - k_1) \times (k_2 - k_1)$ nonsingular matrix, as a check matrix of a stabilizer group $\mathcal{S}$, an $[[n, k_2 + k_1 - n, d \geqslant \min\{d_1, \lceil \frac{3d_2}{2} \rceil\}]]$ quantum code $\mathcal{C}(\mathcal{S})$ can be constructed. A generator matrix of $\bar{S}^{\perp *}$ can be

$$G = \left(\begin{array}{c|c} G_1 & O \\ O & G_1 \\ G_3 & PG_3 \end{array} \right).$$

Proof. It is easy to see that the two matrices H and G are of full rank and have rank $(2n - k_1 - k_2)$ and rank $k_1 + k_2$, respectively. Since $\mathcal{C}_1^{\perp} \subset \mathcal{C}_1$, we have $H_1 H_1^T = O$ and hence $H_2 H_2^T = O$, $H_3 H_3^T = O$, $H_2 H_3^T = O$. Thus

$$\begin{aligned} H \Lambda H^T =& \begin{pmatrix} H_2 \\ O \\ QH_3 \end{pmatrix} \begin{pmatrix} O^T & H_2^T & H_3^T \end{pmatrix} + \begin{pmatrix} O \\ H_2 \\ H_3 \end{pmatrix} \begin{pmatrix} H_2^T & O^T & H_3^T Q^T \end{pmatrix} \\ =& \begin{pmatrix} H_2 O^T & H_2 H_2^T & H_2 H_3^T \\ O O^T & O H_2^T & O H_3^T \\ QH_3 O^T & QH_3 H_2^T & QH_3 H_3^T \end{pmatrix} + \begin{pmatrix} O H_2^T & O O^T & O H_3^T Q^T \\ H_2 H_2^T & H_2 O^T & H_2 H_3^T Q^T \\ H_3 H_2^T & H_3 O^T & H_3 H_3^T Q^T \end{pmatrix} \\ =& O + O = O, \end{aligned}$$

and Eq. (3) holds. Since $H_1 G_1^T = O$ and $H_2 G_2^T = O$, we have $H_2 G_1^T = O$, $H_3 G_1^T = O$, and

$H_2G_3^T = O$. Thus

$$
\begin{aligned}
H\Lambda G^T &= \begin{pmatrix} H_2 \\ O \\ QH_3 \end{pmatrix} \begin{pmatrix} O^T & G_1^T & G_3^T P^T \end{pmatrix} + \begin{pmatrix} O \\ H_2 \\ H_3 \end{pmatrix} \begin{pmatrix} G_1^T & O^T & G_3^T \end{pmatrix} \\
&= \begin{pmatrix} H_2O^T & H_2G_1^T & H_2G_3^TP^T \\ OO^T & OG_1^T & OG_3^TP^T \\ QH_3O^T & QH_3G_1^T & QH_3G_3^TP^T \end{pmatrix} + \begin{pmatrix} OG_1^T & OO^T & OG_3^T \\ H_2G_1^T & H_2O^T & H_2G_3^T \\ H_3G_1^T & H_3O^T & H_3G_3^T \end{pmatrix} \\
&= \begin{pmatrix} O & O & O \\ O & O & O \\ O & O & \left(H_3G_3^T\right)\left(P^T\right)^{-1}\left(H_3G_3^T\right)^{-1} H_3G_3^TP^T + H_3G_3^T \end{pmatrix} \\
&= O,
\end{aligned}
$$

and Eq. (4) holds. The minimum distance d of $\mathcal{C}(\mathcal{S})$ is determined as follows. Consider a nonzero codeword $(c_1, c_2) = (u_1|u_2|u_3) \left(\begin{array}{c|c} G_1 & O \\ O & G_1 \\ G_3 & PG_3 \end{array} \right) = (u_1G_1 + u_3G_3, u_2G_1 + u_3PG_3)$ in $\bar{\mathcal{S}}^{\perp *}$, with two k_1-tuples u_1, u_2 and a $(k_2 - k_1)$-tuple u_3, not all zero tuples. It is clear that $c_1, c_2 \in \mathcal{C}_2$ and $w(c_1) \geqslant d_2, w(c_2) \geqslant d_2$. If $c_1 \neq c_2$, then $w(c_1 + c_2) \geqslant d_2$ and we have

$$
\begin{aligned}
gw(c_1, c_2) &= w(c_1) + w(c_1) - w(c_1c_2) \\
&= \frac{1}{2}\left(w(c_1) + w(c_2) + (w(c_1) + w(c_2) - 2w(c_1c_2))\right) \\
&= \frac{1}{2}\left(w(c_1) + w(c_2) + w(c_1 + c_2)\right) \geqslant \frac{3d_2}{2}.
\end{aligned}
$$

Now if $c_1 = c_2$, then $u_1G_1 + u_3G_3 = u_2G_1 + u_3PG_3$ and then $(u_1 + u_2)G_1 + u_3G_3 = u_3PG_3$. Since G_1 and G_3 have linearly independent rows, we must have $u_1 + u_2 = 0$ and $u_3G_3 = u_3PG_3$. However, since $I + P$ is nonsingular, $u_3G_3 = u_3PG_3$ if and only if $u_3 = 0$. Since u_1, u_2, u_3 are not all zero tuples, we have nonzero $u_1 = u_2$ and $c_1 = u_1G_1 \in \mathcal{C}_1, c_2 = u_2G_1 = u_1G_1 = c_1$. Thus $gw(c_1, c_2) = w(c_1) \geqslant d_1$. In conclusion, the minimum distance of the quantum code is

$$
d \geqslant \min\{d_1, \left\lceil \frac{3d_2}{2} \right\rceil\}.
$$

□

3 A Simple Construction of Stabilizer Codes

3.1 Syndrome Assignment and Check Matrices

Given a stabilizer group $\mathcal{S}$ together with a set of independent generators $\{g_1, g_2, \ldots, g_r\}$, the encoding-decoding techniques of the corresponding stabilizer code is well studied in [12].

But one may ask the question: how to find a set of independent generators $g_1, g_2, \dots, g_r$ such that the generated stabilizer group will correspond to a good quantum code?

In [10], Gottesman constructed a class of stabilizer codes saturating the quantum Hamming bound which says that

$$2^k \sum_{i=0}^{t} 3^i \binom{n}{i} \leqslant 2^n.$$

These codes encode $k = n - j - 2$ in $n = 2^j$ qubits and correct up to $t = 1$ error. He assigned an "error syndrome" to each correctable error operator according to a certain rule so that error syndromes form a check matrix of the stabilizer group. This is a brilliant idea of giving a set of independent generators $g_1, g_2, \dots, g_r$. We will basically follow this idea to construct $[[n, k, d]]$ quantum codes for the general case of $t = \lfloor \frac{d-1}{2} \rfloor \geq 1$.

3.1.1 Error Syndromes

In classical coding theory, correctable error patterns are a collection of error patterns which have distinct error syndromes. The same concept holds in non-degenerate quantum codes and hence can be applied to construct non-degenerate quantum stabilizer codes. In stabilizer codes, the idea of error syndrome comes from the commutativity. The error-correction condition for stabilizer codes in (1) says that the multiplication of any two correctable error operators in $\mathcal{G}_n$, each with weight no more than t, is not in $N(\mathcal{S}) - \tilde{\mathcal{S}}$. So each correctable error operator is assigned with a binary pattern indicating the commutative relation between the error operator and each one of the generators of a stabilizer code. For our purposes, we will take a stricter error-correction condition that multiplication of any two correctable error operators, each with weight less than or equal to t, must anti-commute with some element in $\mathcal{S}$.

As in [10], for any $g \in \mathcal{G}_n$, we define $f_g : \mathcal{G}_n \mapsto \mathbb{Z}_2$ by

$$f_g(h) = \begin{cases} 0, & \text{if } [\text{g,h}]\text{=0}, \\ 1, & \text{if } \{\text{g,h}\}\text{=0}, \end{cases}$$

where $[g, h] = gh - hg$ and $\{g, h\} = gh + hg$. It can be verified that f_g is a group homomorphism. Then for a given set of independent generators g_1, g_2, …, g_r of a stabilizer group $\mathcal{S}$, we define $f_{\mathcal{S}} : \mathcal{G}_n \mapsto (\mathbb{Z}_2)^r$ by

$$f_{\mathcal{S}}(h) = \left(f_{g_1}(h), f_{g_2}(h), \dots, f_{g_r}(h)\right)^T.$$

It is clear that

$$f_{\mathcal{S}}(h) = H\Lambda\varphi(h)^T, \tag{5}$$

where H is the check matrix of $\mathcal{S}$ corresponding to the (ordered) generators $g_1, g_2, \dots, g_r$. Note that $f_{\mathcal{S}}$ is a group homomorphism. It is also clear that $f_{\mathcal{S}}(h) = (0, 0, \dots, 0)^T$ if and only if h commutes with every element in $\mathcal{S}$, i.e., $h \in N(\mathcal{S})$. We call $f_{\mathcal{S}}(E)$ the *error syndrome* of E for each error operator E in $\mathcal{G}_n$. The error syndrome in this definition is equivalent to that defined in [14] with $+1, -1$ in place of $0, 1$, respectively. For any two correctable error operators E_1 and E_2 in $\mathcal{G}_n$, each with weight less than or equal to t, we attempt to construct a stabilizer group S such that $f_{\mathcal{S}}(E_1E_2)$ is a nonzero vector. Since $f_{\mathcal{S}}$ is a group homomorphism,

$$f_{\mathcal{S}}(E_1E_2) \neq 0 \Leftrightarrow f_{\mathcal{S}}(E_1) \neq f_{\mathcal{S}}(E_2).$$

As a result, we need to assign distinct error syndromes to distinct correctable error operators.

If we can correct error operators $X_1, \ldots, X_n, Y_1, \ldots, Y_n, Z_1, \ldots, Z_n$ and the multiplication of any no more than t of them, we are able to correct all error operators up to weight t. We call these $3n$ error operators to be basic correctable error operators. Moreover, since the set $\{X_1, X_2, \ldots, X_n, Z_1, Z_2, \ldots, Z_n\}$ generates all the error operators in $\mathcal{G}_n$ by multiplication up to a scalar factor, it is desirable to determine the error syndromes of these $2n$ basic correctable error operators so that the error syndromes of all correctable error operators are distinct from each other. For the case of $t = 1$, it has been done in [10]. For the general case of $t \geqslant 2$, it becomes challenging to assign error syndromes to the $2n$ basic correctable error operators so that the error syndromes of correctable error operators of weight no more than t are all distinct.

From (5), we observe that the first n columns and the last n columns of the check matrix of a stabilizer group $\mathcal{S}$ corresponding to the (ordered) independent generators $g_1, g_2, \ldots, g_r$ are $f_{\mathcal{S}}(Z_1)$, $f_{\mathcal{S}}(Z_2)$, …,$f_{\mathcal{S}}(Z_n)$ and $f_{\mathcal{S}}(X_1)$, $f_{\mathcal{S}}(X_2)$, …, $f_{\mathcal{S}}(X_n)$, respectively. Thus we can establish a check matrix of a target stabilizer group $\mathcal{S}$ by assigning $2n$ error syndromes as its columns $f_{\mathcal{S}}(Z_1)$, $f_{\mathcal{S}}(Z_2)$, …,$f_{\mathcal{S}}(Z_n)$, $f_{\mathcal{S}}(X_1)$, $f_{\mathcal{S}}(X_2)$, …, $f_{\mathcal{S}}(X_n)$ and verifying this matrix to be commutative. In this way, the method of syndrome assignment is just to define a *legal* check matrix.

3.1.2 Syndrome Assignment by a Binary Parity-Check Matrix

Let $E = X_\alpha Z_\beta$ be an error operator of weight no more than t^*, where $\alpha = (a_1, \ldots, a_n)$, $\beta = (b_1, \ldots, b_n)$ and $gw(\alpha, \beta) \leq t^*$. Then for a target stabilizer group $\mathcal{S}$,

$$f_{\mathcal{S}}(E) = f_{\mathcal{S}}(X_\alpha Z_\beta) = \sum_{i=1}^{n} a_i f_{\mathcal{S}}(X_i) + \sum_{i=1}^{n} b_i f_{\mathcal{S}}(Z_i),$$

which is a linear combination of at most $2t^*$ terms. To ensure that the error syndromes of two distinct error operators $E_1 = X_{\alpha_1} Z_{\beta_1}$ and $E_2 = X_{\alpha_2} Z_{\beta_2}$ with $\alpha_1 = (a_1, \ldots, a_n)$, $\beta_1 = (b_1, \ldots, b_n)$, $gw(\alpha_1, \beta_1) \leq t^*$ and $\alpha_2 = (u_1, \ldots, u_n)$,$\beta_2 = (v_1, \ldots, v_n)$, $gw(\alpha_2, \beta_2) \leq t^*$ are distinct, we must have

$$\begin{aligned} f_{\mathcal{S}}(E_1) \neq f_{\mathcal{S}}(E_2) &\Leftrightarrow f_{\mathcal{S}}(E_1) + f_{\mathcal{S}}(E_2) \neq 0 \\ &\Leftrightarrow \sum_{i=1}^{n} (a_i + u_i) f_{\mathcal{S}}(X_i) + \sum_{i=1}^{n} (b_i + v_i) f_{\mathcal{S}}(Z_i) \neq 0, \end{aligned} \tag{6}$$

which is a linear combination of at most $4t^*$ terms. Thus a sufficient condition to guarantee the distinction among error syndromes of error operators of weight no more than t^* is that any $4t^*$ elements in the set $\{f_{\mathcal{S}}(X_1), f_{\mathcal{S}}(X_2), \ldots, f_{\mathcal{S}}(X_n), f_{\mathcal{S}}(Z_1), f_{\mathcal{S}}(Z_2), \ldots, f_{\mathcal{S}}(Z_n)\}$ must be linearly independent. Surprisingly, this is just a property of a parity-check matrix of a classical linear block code with minimum distance $d' \geqslant 4t^* + 1$, where any $d' - 1$ column vectors of the parity-check matrix must be linearly independent.

From the above discussion, we now know how to do syndrome assignment so that all correctable error operators will have distinct error syndromes from each other. We first choose a classical $[2n, n+k, d']$ binary linear block code $\mathcal{C}'$ with $d' \geq 4t^* + 1$ and $k > 0$. Let H' be a parity-check matrix of $\mathcal{C}'$ with dimension $(n-k) \times 2n$. Then the $2n$ column vectors of H' will be assigned as $f_{\mathcal{S}}(X_i)$'s and $f_{\mathcal{S}}(Z_i)$'s. There are $(n-k)$ independent generators of the target stabilizer group $\mathcal{S}$ and the corresponding target check matrix H is just the permutation of the column vectors of H', i.e., $H = H'P$ for some permutation matrix P. Then the commutative condition becomes

$$H'P\Lambda P^T H'^T = O. \tag{7}$$

If G' is a generator matrix of $\mathcal{C}'$, then the symplectic dual $\bar{\mathcal{S}}^{\perp *}$ of $\bar{\mathcal{S}}$ in $\mathbb{Z}_2^{2n}$ has a generator matrix

$$G = G'P\Lambda$$

since

$$H\Lambda G^T = H'P\Lambda\Lambda^T P^T G'^T = H'G'^T = O.$$

If the target check matrix H satisfies (7), then H is indeed a check matrix of a stabilizer group which corresponds to a quantum code that is at least t^*-error correcting. The dimension of the quantum code is $n - (n-k) = k$. Thus the choice of $k > 0$ ensures that the corresponding quantum code is of dimension greater than zero.

We conclude the above discussion in the following theorem.

Theorem 2. Given an $(n-k) \times 2n$ parity-check matrix H' of a binary $[2n, n+k, d']$ linear block code $\mathcal{C}'$ with minimum distance $d' \geqslant 4t^* + 1$, such that (7) holds for a certain permutation P, an $[[n, k, d \geq 2t^* + 1]]$ stabilizer code with a check matrix $H = H'P$ can be constructed.

A t^*-error-correcting quantum code of length n has

$$\sum_{i=0}^{t^*} \binom{n}{i} 3^i$$

error syndromes. One may expect that a quantum code by the above construction can correct more than just those error operators of weight$\leqslant t^*$ when t^* is determined from d' in Theorem 2. In fact, any error operator $E = X_\alpha Z_\beta$ with $w(\alpha) + w(\beta) \leqslant 2t^*$ has its own unique syndrome and then can be corrected. For example, error operators X_α and Z_α with $w(\alpha) = 2t^*$ are correctable.

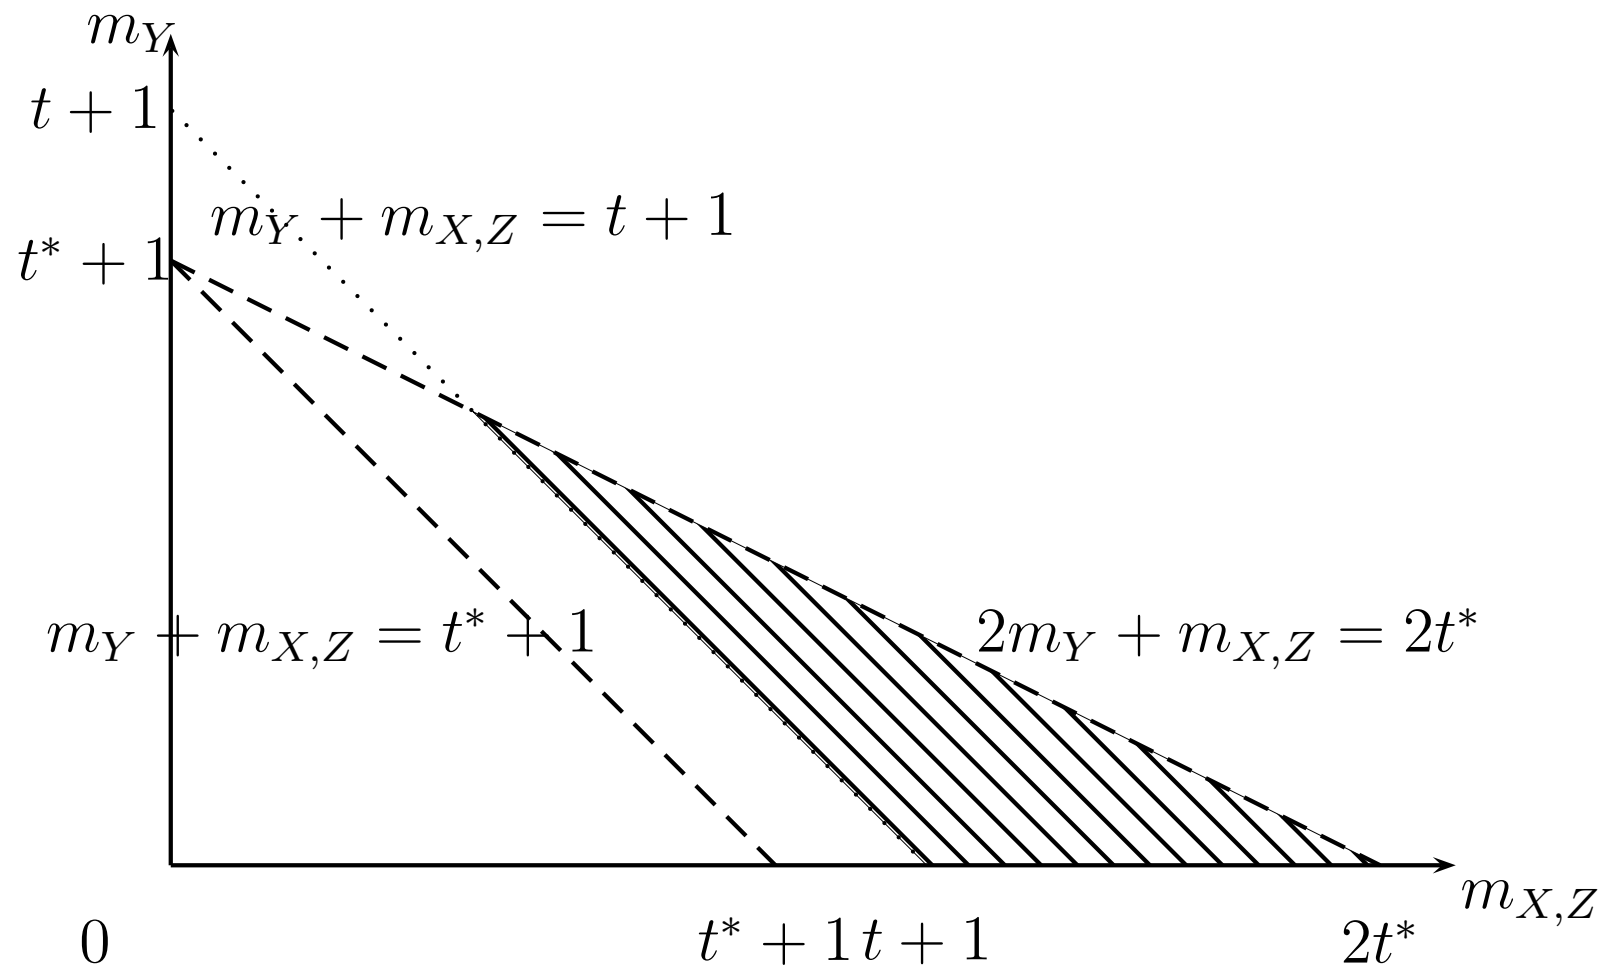

Figure 1: The $m_{X,Z} - m_Y$ region of additional correctable error operators. The $m_{X,Z}$-axis represents the number of components M_j's of error operator E equal to X or Z and the m_Y-axis represents the number of components M_j's equal to Y.

Let $E = i^c M_1 \otimes M_2 \otimes \ldots \otimes M_n = X_\alpha Z_\beta$, $\alpha = (a_1, \ldots, a_n)$, $\beta = (b_1, \ldots, b_n) \in \mathbb{Z}_2^n$, be a correctable error operator with $w(\alpha) + w(\beta) \leqslant 2t^*$. Let $l = gw(\alpha, \beta)$, the weight of E, and then $0 \leqslant l \leqslant 2t^*$. Let $m_Y = w(\alpha\beta)$, the number of M_j's equal to Y, and then $m_{X,Z} = l - m_Y$ represents the number of the M_j's equal to X or Z. Since $w(\alpha) + w(\beta) = 2m_Y + m_{X,Z} = m_Y + l$, we have $m_Y + l \leqslant 2t^*$ (note that $l = m_{X,Z} + m_Y$). There are

$$\binom{n}{l}\binom{l}{m_Y}2^{l-m_Y}$$

correctable error operators for a certain l and a certain m_Y satisfying $0 \leqslant m_Y \leqslant l$ and $0 \leqslant m_Y + l \leqslant 2t^*$. Summing l from t^*+1 to $2t^*$ and summing m_Y from 0 to $2t^* - l$, we have additional

$$\sum_{l=t^*+1}^{2t^*} \sum_{m_Y=0}^{2t^*-l} \binom{n}{l}\binom{l}{m_Y}2^{l-m_Y} \tag{8}$$

correctable error operators of weight $> t^*$, which can be a large amount! Figure 1 illustrates the $m_{X,Z} - m_Y$ region of all additional correctable error operators of weight $l = m_{X,Z} + m_Y > t^*$ as the dashed triangle.

On the other hand, for a given stabilizer group $\mathcal{S}$ with quantum error-correcting capability t, the classical minimum distance d' of a check matrix of $\mathcal{S}$ can be used to determine the existence of additional correctable error operators of weight $> t$ and how many of them as stated in the following theorem and illustrated in the dashed triangle in Figure 1.

Theorem 3. Let t be the quantum error correcting capability of a stabilizer code $\mathcal{C}(\mathcal{S})$. Let t^* be an estimate of t by a check matrix of $\mathcal{S}$ as in Theorem 2. If $t < 2t^*$ or $\lfloor \frac{d-1}{2} \rfloor < 2\lfloor \frac{d'-1}{4} \rfloor$, then we have additional

$$\sum_{l=t+1}^{2t^*} \sum_{m_Y=0}^{2t^*-l} \binom{n}{l}\binom{l}{m_Y}2^{l-m_Y}$$

correctable error operators of weight $> t$.

Finally we give a slight improvement of Theorem 2. Define a matrix $H_Y \triangleq H_X + H_Z$ for a check matrix $H = \left(H_X \mid H_Z \right)$ of $\mathcal{S}$. Let $\mathcal{C}_X$, $\mathcal{C}_Z$, $\mathcal{C}_Y$ be classical binary linear block codes with parity-check matrices H_X, H_Z, H_Y, respectively. If error syndromes of all correctable error operators of weight no more than t^* are distinct, it is necessary that $\mathcal{C}_X, \mathcal{C}_Z, \mathcal{C}_Y$ have minimum distance $\geqslant 2t^* + 1$.

Corollary 4. If C_Y has minimum distance $\geqslant 2t^* + 1$, the condition in Theorem 2 can be reduced to $d' \geq 4t^*$.

Proof. We only need to consider two distinct error operators $E_1 = X_{\alpha_1} Z_{\beta_1}$ and $E_2 = X_{\alpha_2} Z_{\beta_2}$ with $\alpha_1 = (a_1, \ldots, a_n)$, $\beta_1 = (b_1, \ldots, b_n)$, $gw(\alpha_1, \beta_1) = t^*$ and $\alpha_2 = (u_1, \ldots, u_n)$, $\beta_2 = (v_1, \ldots, v_n)$, $gw(\alpha_2, \beta_2) = t^*$ such that

$$f_{\mathcal{S}}(E_1) + f_{\mathcal{S}}(E_2) = \sum_{i=1}^{n} (a_i + u_i) f_{\mathcal{S}}(X_i) + \sum_{i=1}^{n} (b_i + v_i) f_{\mathcal{S}}(Z_i)$$

is a linear combination of $4t^*$ columns of H. Then we must have $\alpha_1 = \beta_1$, $\alpha_2 = \beta_2$, $w(\alpha_1 + \alpha_2) = 2t^*$ and then

$$f_{\mathcal{S}}(E_1) + f_{\mathcal{S}}(E_2) = \sum_{i=1}^{n} (a_i + u_i) f_{\mathcal{S}}(Y_i),$$

which is a linear combination of $2t^*$ columns of H_Y. Since C_Y has minimum distance $\geqslant 2t^*+1$, we have

$$f_{\mathcal{S}}(E_1) + f_{\mathcal{S}}(E_2) \neq 0.$$

Thus (6) holds for the extreme case—a linear combination of exact $4t^*$ terms. □

3.2 Constructions of Check Matrices

Our construction of a check matrix of a stabilizer group needs a binary commutative parity-check matrix of even length. We suggest three ways to establish commutative parity-check matrices by using classical constructions of new codes from old ones [16] such that the minimum distances of the resulted quantum codes can be determined from the corresponding classical binary linear block codes.

Construction I: Let G_1, G_2 be generator matrices of an $[n, k_1, d_1]$ and an $[n, k_2, d_2]$ binary linear block codes $\mathcal{C}_1, \mathcal{C}_2$, respectively, such that $k_1 + k_2 > n$. Let H_1, H_2 be parity-check matrices of $\mathcal{C}_1, \mathcal{C}_2$, respectively. Then $G' = \left[\begin{array}{c|c} G_1 & O \\ O & G_2 \end{array} \right]$ is a generator matrix of a $[2n, k_1 + k_2, d' = \min\{d_1, d_2\}]$ code with a parity-check matrix $H' = \left[\begin{array}{c|c} H_1 & O \\ O & H_2 \end{array} \right]$. H' is commutative if and only if $H_1 H_2^T = O$, i.e., the classical dual code of $\mathcal{C}_2$ is a subcode of $\mathcal{C}_1$. In this way, by choosing $H = H'$ as a check matrix of a stabilizer group $\mathcal{S}$ and $G = G'\Lambda = \left[\begin{array}{c|c} O & G_1 \\ G_2 & O \end{array}\right]$ as a generator matrix of the symplectic dual code $\bar{S}^{\perp *}$, $\mathcal{C}(\mathcal{S})$ is an $[[n, k_1 + k_2 - n, d \geq d^* = \min\{d_1, d_2\}]]$ quantum code, where d^* equals to the minimum generalized weight of $\bar{S}^{\perp *}$, which corresponds to a vector of minimum weight in C_1 or in C_2. Since $d^* = d'$, we have $\lfloor \frac{d^*-1}{2} \rfloor \geq 2\lfloor \frac{d'-1}{4} \rfloor$ and there is no additional correctable error operators of weight $> \lfloor \frac{d^*-1}{2} \rfloor$ guaranteed by Theorem 3. Note that the construction of CSS codes is a special case of Construction I.

Construction II: Let G_1, G_2 be generator matrices of an $[n, k, d_1]$ and an $[n, k, d_2]$ binary linear block codes $\mathcal{C}_1, \mathcal{C}_2$, respectively. Let H_1, H_2 be parity-check matrices of $\mathcal{C}_1, \mathcal{C}_2$, respectively. Then $G' = [G_1 | \, G_2]$ is a generator matrix of a $[2n, k, d' \geqslant d_1 + d_2]$ binary linear block code $\mathcal{C}'$. A parity-check matrix of $\mathcal{C}'$ is $H' = \begin{bmatrix} H_1 & O \\ O & H_2 \\ A & B \end{bmatrix}$, where A, B are two matrices such that $G_1 A^T + G_2 B^T = O$ and the rank of H' is $2n - k$, which is greater than n. Since H' has too many rows to be a check matrix, we consider the code $\mathcal{C}'^{\perp}$, the classical dual code of $\mathcal{C}'$, instead. If the matrix G' is commutative, we choose $H = G' = [G_1 | \, G_2]$ as a check matrix of a stabilizer group $\mathcal{S}$. However, it remains to determine the classical minimum distance of $\mathcal{C}'^{\perp}$.

Construction III: ($|u|u+v|$ construction) Let G_1 and G_2 be generator matrices of an $[n, k_1, d_1]$ and an $[n, k_2, d_2]$ binary linear block codes $\mathcal{C}_1, \mathcal{C}_2$, respectively. Then $G' = \left[\begin{array}{c|c} G_1 & G_1 \\ O & G_2 \end{array}\right]$ is a generator matrix of a $[2n, k_1 + k_2, d' \geqslant \min\{d_1, d_2\}]$ code. Let H_1, H_2 be parity-check matrices of $\mathcal{C}_1, \mathcal{C}_2$, respectively. A parity-check matrix is $H' = \left[\begin{array}{c|c} H_2 & H_2 \\ H_1 & O \end{array}\right]$. H' is commutative if and only if $H_1 H_2^T = O$, i.e., the classical dual code of $\mathcal{C}_2$ is a subcode of $\mathcal{C}_1$. In this case, we take H' as a check matrix H of a stabilizer group $\mathcal{S}$. The minimum generalized weight of a generator matrix $G = G'\Lambda$ of $\bar{\mathcal{S}}^{\perp *}$ is $\min\{d_1, d_2\}$. Hence the stabilizer code $\mathcal{C}(\mathcal{S})$ has parameters $[[n, k_1 + k_2 - n, d \geqslant \min\{d_1, d_2\}]]$.

When $\mathcal{C}_1$ is a subcode of $\mathcal{C}_2$, we consider the effect of a permutation matrix $P' = \begin{pmatrix} I & O \\ O & P \end{pmatrix}$ on the $|u|u+v|$ construction. Let $H'' = H'P' = \begin{pmatrix} H_2 & H_2 P \\ H_1 & O \end{pmatrix}$. H'' is commutative if and only if $H_2 P H_2^T = H_2 P^T H_2^T$ and $H_2 P H_1^T = O$. In this case, we take H'' as a check matrix H of a stabilizer group $\mathcal{S}$. Then $G = G'P'\Lambda = \begin{pmatrix} G_1 P & G_1 \\ G_2 P & O \end{pmatrix}$ is a generator matrix of $\bar{S}^{\perp *}$. Consider a nonzero codeword

$$(c_1, c_2) = (u_1 | u_2) \left(\begin{array}{c|c} G_2 P & G_2 \\ G_1 P & O \end{array} \right) = (u_1 G_2 P + u_2 G_1 P, u_1 G_2)$$

in $\bar{S}^{\perp *}$, with a k_1-tuple u_1 and a k_2-tuple u_2, not both zero tuples. It is clear that $c_1 \in \mathcal{C}_2 P$,

$c_2 \in \mathcal{C}_2$ and $w(c_1) \geqslant d_2$, $w(c_2) \geqslant d_2$. Then

$$\begin{aligned} gw(c_1, c_2) &= w(c_1) + w(c_1) - w(c_1c_2) \\ &= \frac{1}{2}\left(w(c_1) + w(c_2) + (w(c_1) + w(c_2) - 2w(c_1c_2))\right) \\ &= \frac{1}{2}\left(w(c_1) + w(c_2) + w(c_1 + c_2)\right) \\ &\geqslant d_2 + \frac{w(c_1 + c_2)}{2}. \end{aligned}$$

If

$$\min_{c_1 \neq \mathbf{0} \text{ or } c_2 \neq \mathbf{0}} \frac{1}{2} w(c_1 + c_2) > 0,$$

we can obtain a quantum code of a greater minimum distance.

Theorem 5. Let $\mathcal{C}_1$ be a subcode of $\mathcal{C}_2$ with $d_1 > d_2$ and let H_1, H_2 be parity-check matrices of $\mathcal{C}_1, \mathcal{C}_2$, respectively. Assume that P be a permutation matrix such that

$$H_1 P H_1^T = H_1 P^T H_1^T, \quad H_1 P H_2^T = O \tag{9}$$

and

$$\mathcal{C}_1 P = \mathcal{C}_1, \quad \mathcal{C}_2 P = \mathcal{C}_2. \tag{10}$$

Let G_1 and $G_2 = \begin{bmatrix} G_3 \\ G_1 \end{bmatrix}$ be generator matrices of $\mathcal{C}_1$ and $\mathcal{C}_2$, respectively, such that

$$uG_3P \neq uG_3 \text{ for any nonzero } (k_2 - k_1)\text{-tuple } u. \tag{11}$$

Then there is an $[[n, k_2+k_1-n, d \geqslant \min\{d_1, \lceil \frac{3d_2}{2} \rceil\}]]$ stabilizer code $\mathcal{C}(\mathcal{S})$ with a corresponding stabilizer group $\mathcal{S}$ such that

$$G = \left(\begin{array}{c|c} G_2P & G_2 \\ G_1P & O \end{array}\right) = \left(\begin{array}{c|c} G_3P & G_3 \\ G_1P & G_1 \\ G_1P & O \end{array}\right)$$

is a generator matrix of $\bar{S}^{\perp *}$.

Proof. A check matrix of $\mathcal{S}$ is

$$H = \begin{pmatrix} H_1 & H_1P \\ H_2 & O \end{pmatrix}$$

since Eq. (3) holds by (9). Consider a nonzero codeword

$$(c_1, c_2) = (u_1|u_2|u_3) \left(\begin{array}{c|c} G_3P & G_3 \\ G_1P & G_1 \\ G_1P & O \end{array}\right) = (u_1G_3P + (u_2 + u_3)G_1P, u_1G_3 + u_2G_1)$$

in $\bar{\mathcal{S}}^{\perp *}$, with two k_1-tuples u_1, u_2 and a $(k_2 - k_1)$-tuple u_3, not all zero tuples. It is clear that $c_1 \in \mathcal{C}_2 P = \mathcal{C}_2, c_2 \in \mathcal{C}_2$ and $w(c_1) \geqslant d_2, w(c_2) \geqslant d_2$. If $u_1 \neq 0$,

$$\begin{aligned} c_1 + c_2 &= u_1 G_3 P + (u_2 + u_3) G_1 P + u_1 G_3 + u_2 G_1 \\ &= (u_1 G_3 P + u_1 G_3) + ((u_2 + u_3) G_1 P + u_2 G_1). \end{aligned}$$

Since $u_1 G_3 P + u_1 G_3 \in \mathcal{C}_2 - \mathcal{C}_1$ by (10) and (11) and $(u_2 + u_3) G_1 P + u_2 G_1 \in \mathcal{C}_1$ by (10), we have $c_1 + c_2 \neq \mathbf{0}$ in $\mathcal{C}_2$ and $w(c_1 + c_2) \geqslant d_2$. Then

$$gw(c_1, c_2) = \frac{1}{2} \left(w(c_1) + w(c_2) + w(c_1 + c_2) \right) \geqslant \frac{3d_2}{2}.$$

If $u_1 = \mathbf{0}$, we have $c_1 = (u_2 + u_3) G_1 P \in \mathcal{C}_1$ and $c_2 = u_2 G_1 \in \mathcal{C}_1$. Hence

$$gw(c_1, c_2) = w(c_1) + w(c_2) - w(c_1 c_2) \geqslant d_1.$$

Therefore, the minimum distance of the quantum code is $d \geqslant \min\{d_1, \lceil \frac{3d_2}{2} \rceil\}$. $\square$

Further investigation on the classical minimum distance may guarantee additional correctable error operators of weight greater than the quantum error-correcting capability by Theorem 3. A family of quantum Reed-Muller codes will be constructed by the $|u|u + v|$ construction in Section 4.

3.3 Existence of Commutative Parity-Check Matrices

There is an important question: for a given $r \times (2n)$ parity-check matrix H, where $r < n$, does there exist an effective permutation matrix P such that HP is commutative?

To answer this question, we run a simulation on a computer as follows. Let $H = \left[\begin{array}{c|c} I_{r\times r} & B \end{array} \right]$, where B is a randomly generated $r \times (2n - r)$ matrix. Each element of B is 1 or 0 with probability p_1 and $p_0 = 1 - p_1$, respectively. By exhaustive search with $(2n)!$ permutations for the case $n = 5$, unfortunately, we found that there exists an H which has no effective permutation matrix P such that HP is commutative. However, there is a high probability that for a randomly generated matrix $H = \left[\begin{array}{c|c} I_{r\times r} & B \end{array} \right]$, there is an effective permutation matrix P such that HP is commutative. Moreover, if $p_1 < p_0$, the probability becomes higher. This simulation suggests that parity-check matrices of classical LDPC codes may be transformed into legal check matrices by Theorem 2. However, it becomes extremely harder to verify this suggestion for $n \geq 8$ due to prohibitive computing complexity. The question of determining an effective permutation matrix for a parity-check matrix remains open. The construction of quantum stabilizer codes can be converted to the construction of classical linear codes with commutative parity-check matrices.

3.4 Asymptotic Coding Efficiency

In this subsection, we will investigate the asymptotic coding efficiency of the construction of stabilizer codes as stated in Theorem 2 by assuming that among all $[n, k, d]$ binary linear block codes, there is at least one code with a parity-check matrix H and an effective permutation matrix P such that HP is commutative.

Suppose an $[[n, k, d \geq d^* = 2t^* + 1]]$ stabilizer code with a check matrix is constructed by Theorem 2 from a certain $[n' = 2n, k' = k + n, d' \geq 4t^* + 1]$ classical linear block code, where $t^* = \lfloor \frac{d'-1}{4} \rfloor$. Let $\alpha' = \limsup_{n' \to \infty} \frac{k'}{n'}$ and $\alpha = \limsup_{n \to \infty} \frac{k}{n}$. Since

$$\alpha' = \limsup_{n \to \infty} \frac{k+n}{2n} = \frac{1}{2} + \frac{1}{2}\alpha,$$

we have

$$\alpha = 2\alpha' - 1. \tag{12}$$

Let $\delta' = \frac{d'}{n'}$, $\delta^* = \frac{d^*}{n}$ and $\delta = \frac{d}{n}$. Since $\lfloor \frac{d'-1}{4} \rfloor \leq \frac{d'-1}{4} \leq \lfloor \frac{d'-1}{4} \rfloor + 1$, we have $t^* \leq \frac{d'-1}{4} \leq t^* + 1$ and then $2d^* - 1 \leq d' \leq 2d^* + 3$. Thus we have $\frac{2d^*-1}{2n} \leq \delta' \leq \frac{2d^*+3}{2n}$ and then $\delta^* - \frac{1}{2n} \leq \delta' \leq \delta^* + \frac{3}{2n}$. Thus for sufficiently large n, we have

$$\delta^* \simeq \delta'. \tag{13}$$

It is obvious that

$$\delta \geq \delta^* = \delta'. \tag{14}$$

From [17], the classical Hamming bound says that

$$\alpha'(\delta') \leq 1 - H_2(\frac{1}{2}\delta'),$$

where $H_2(x) = -x \log_2(x) - (1-x)\log_2(1-x)$. By (12) and (13), we have a corresponding quantum Hamming bound of the code construction in Theorem 2, which is

$$\alpha(\delta^*) \leq 1 - 2H_2(\frac{1}{2}\delta^*). \tag{15}$$

The classical Plotkin Bound says that

$$\begin{array}{ll} \alpha'(\delta') \leq 1 - 2\delta', & \text{if } 0 \leq \delta' \leq \frac{1}{2}, \\ \alpha'(\delta') = 0, & \text{if } \frac{1}{2} < \delta' \leq 1, \end{array}$$

and by (12) and (13), the corresponding quantum Plotkin bound of the code construction in Theorem 2 is

$$\begin{array}{ll} \alpha(\delta^*) \leq 1 - 4\delta^*, & \text{if } 0 \leq \delta^* \leq \frac{1}{4}; \\ \alpha(\delta^*) = 0, & \text{if } \frac{1}{4} < \delta^* \leq 1. \end{array} \tag{16}$$

The classical Elias Bound says that

$$\begin{array}{ll} \alpha'(\delta') \leq 1 - H_2(\frac{1}{2} - \sqrt{\frac{1}{2}(\frac{1}{2} - \delta')}), & \text{if } 0 \leq \delta' \leq \frac{1}{2}, \\ \alpha'(\delta') = 0, & \text{if } \frac{1}{2} < \delta' \leq 1, \end{array}$$

and by (12) and (13), the corresponding quantum Elias bound is

$$\begin{array}{ll}\alpha(\delta^*) \leq 1 - 2H_2(\frac{1}{2} - \sqrt{\frac{1}{2}(\frac{1}{2} - \delta^*)}), & \text{if } 0 \leq \delta^* \leq \frac{1}{2}; \\ \alpha(\delta^*) = 0, & \text{if } \frac{1}{2} < \delta^* \leq 1. \end{array} \tag{17}$$

The classical weaker McEliece-Rodemich-Rumsey-Welch (MRRW) bound says that

$$\alpha'(\delta') \leq H_2(\frac{1}{2} - \sqrt{\delta'(1-\delta')})$$

and by (12) and (13), the corresponding weaker quantum MRRW bound is

$$\begin{array}{ll}\alpha(\delta^*) \leq 2H_2(\frac{1}{2} - \sqrt{\delta^*(1-\delta^*)}) - 1, & \text{if } \frac{1}{2} \leq H_2(\frac{1}{2} - \sqrt{\delta^*(1-\delta^*)}) \leq 1; \\ \alpha(\delta^*) = 0, & \text{if } 0 \leq H_2(\frac{1}{2} - \sqrt{\delta^*(1-\delta^*)}) \leq \frac{1}{2}. \end{array} \tag{18}$$

The classical singleton bound says that

$$\alpha'(\delta') \leq 1 - \delta',$$

and by (12) and (13), the corresponding quantum singleton bound is

$$\alpha(\delta^*) \leq 1 - 2\delta^*. \tag{19}$$

The classical Gilbert-Varshamov bound says that

$$\alpha'(\delta') \geq 1 - H_2(\delta'),$$

and by (12) and (13), the corresponding quantum Gilbert-Varshamov bound is

$$\alpha(\delta^*) \geq 1 - 2H_2(\delta^*). \tag{20}$$

The above asymptotic bounds for the stabilizer code construction in Theorem 2 are depicted in Fig. 2.

We next compare these asymptotic bounds with known bounds of quantum codes in the literature. In [4, 10], the quantum Hamming bound says that for an $[[n, k, d \geq d = 2t + 1]]$ quantum code,

$$2^k \sum_{i=0}^{t} 3^i \binom{n}{i} \leqslant 2^n,$$

and the asymptotic form is

$$\frac{k}{n} \leq 1 - \frac{t}{n} \log_2 3 - H_2(\frac{t}{n}),$$

or

$$\alpha(\delta) \leq 1 - \frac{1}{2}\delta \log_2 3 - H_2(\frac{1}{2}\delta). \tag{21}$$

The quantum singleton bound [6, 18] says that for an $[[n, k, d]]$ quantum code,

$$n - k \geq 2d - 2,$$

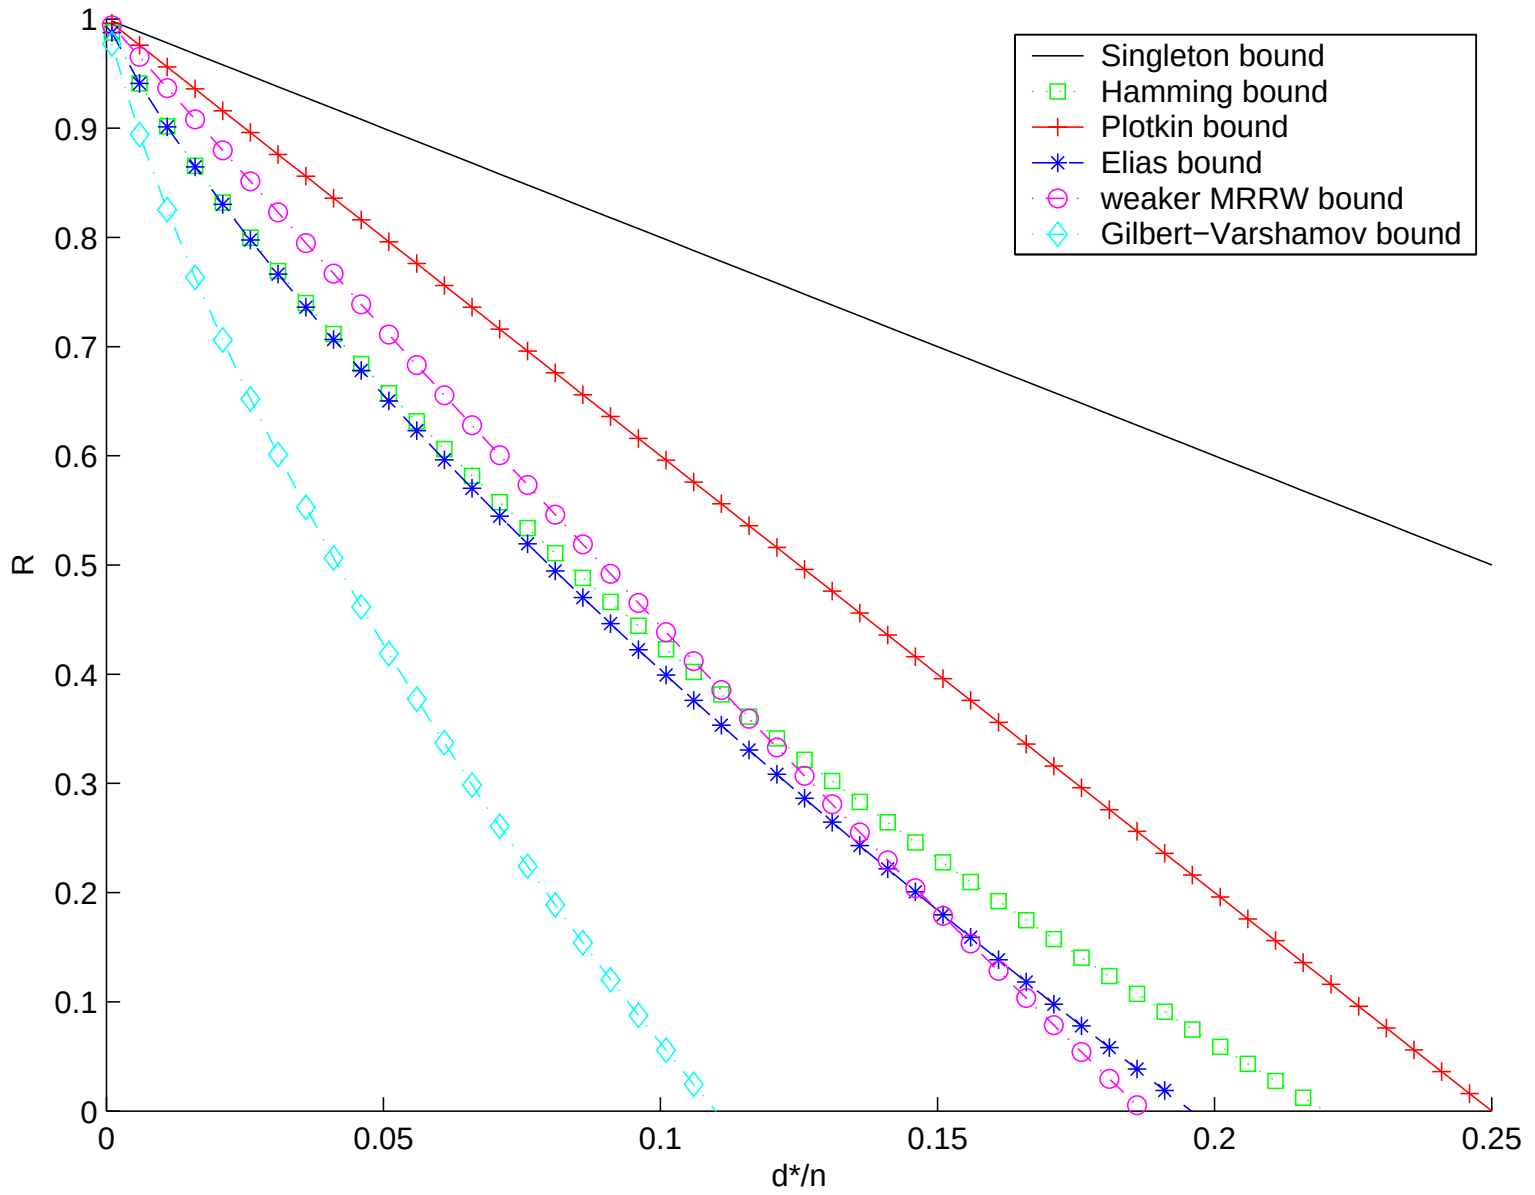

Figure 2: Asymptotic coding bounds for the construction stated in Theorem 2.

or

$$\alpha(\delta^*) \leq 1 - 2\delta. \tag{22}$$

The Gilbert-Varshamov bound for a general quantum stabilizer codes, proved in Theorem 2 in [11], says that an $[[n, k, d = 2t + 1]]$ stabilizer code exists if

$$\frac{k}{n} \geq 1 - \frac{2t}{n}\log_2 3 - H_2(\frac{2t}{n}),$$

or

$$\alpha(\delta) \geq 1 - \delta\log_2 3 - H_2(\delta). \tag{23}$$

The Gilbert-Varshamov bound for CSS codes, proved in Section V in [8], says that an $[[n, k, d = 2t + 1]]$ CSS code exists if

$$\frac{k}{n} \geq 1 - 2H_2(\frac{2t}{n}),$$

or

$$\alpha(\delta) \geq 1 - 2H_2(\delta). \tag{24}$$

The above known quantum bounds in the literature are depicted in Fig. 3. It can be seen that the two singleton bounds (19) and (22) for the stabilizer code construction in Theorem 2 and for the general quantum codes, respectively, are exactly the same. And the two Gilbert-Varshamov bounds (20) and (24) for the stabilizer code construction in Theorem 2 and for CSS codes are also exactly the same. The Gilbert-Varshamov bounds (23) for general stabilizer codes is still better than the Gilbert-Varshamov bounds (20) for the stabilizer code construction in Theorem 2.

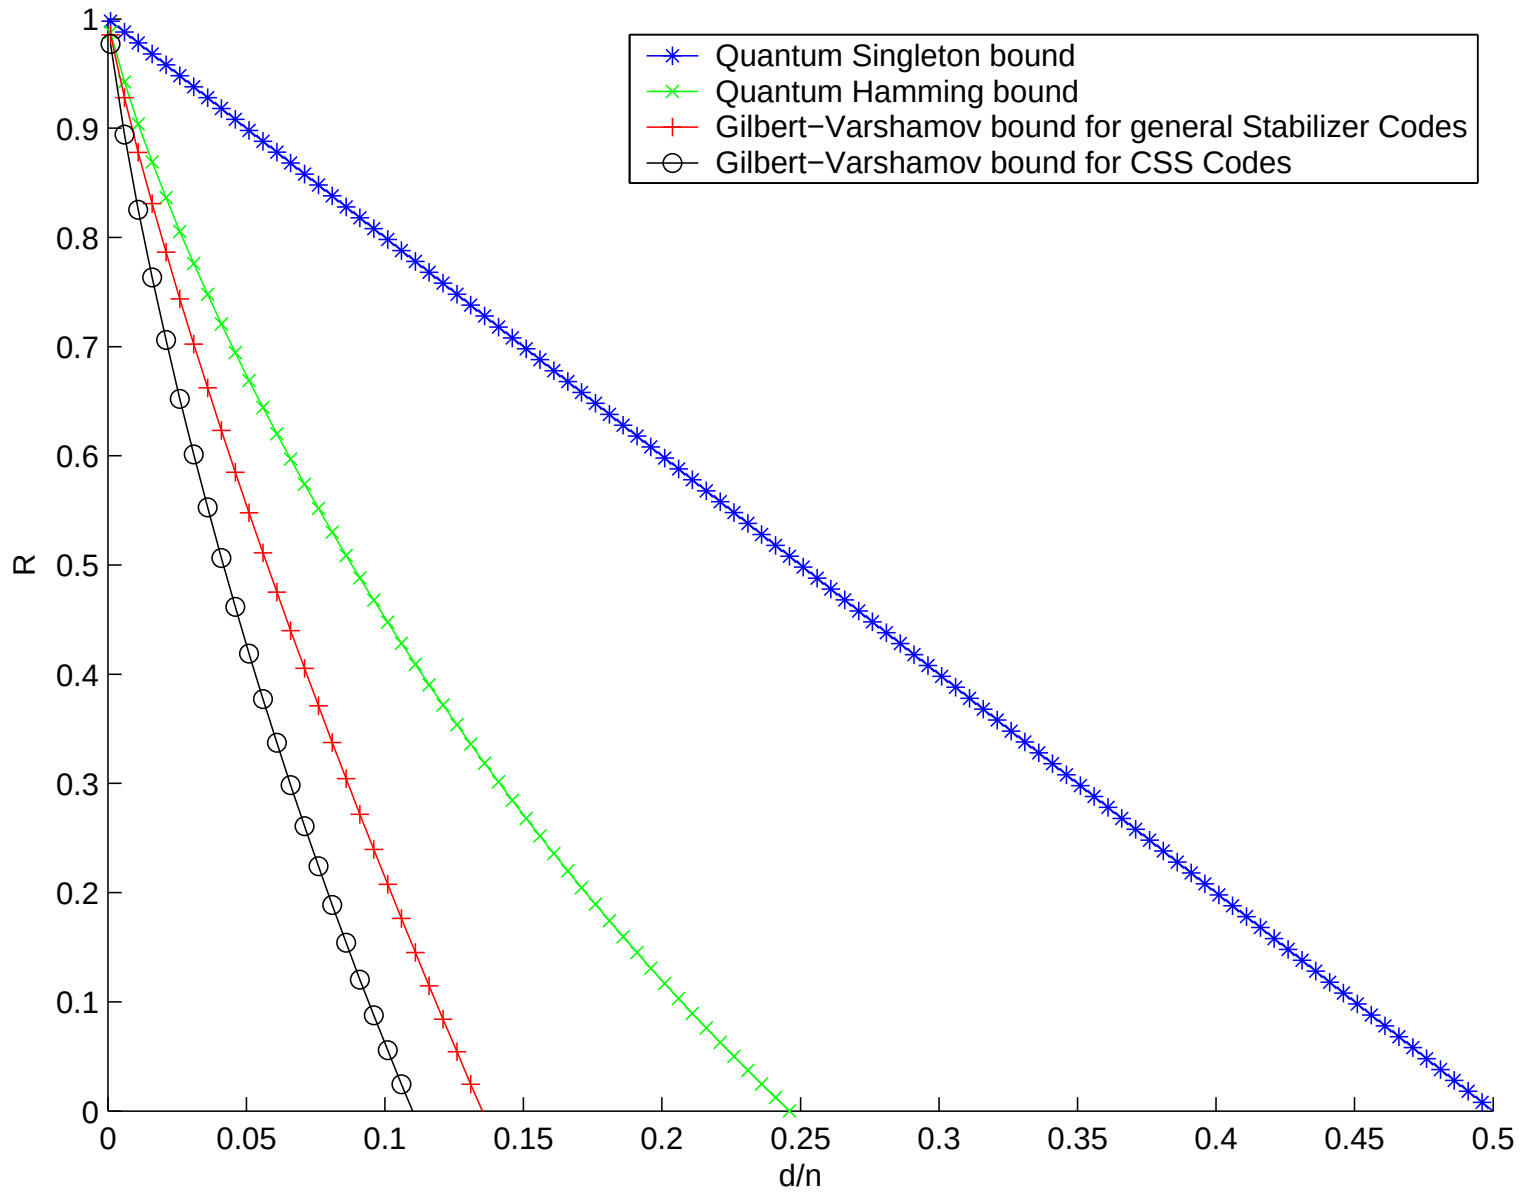

Figure 3: Known quantum bounds in the literature.

.

4 Quantum Reed-Muller Codes

In this section, we will give a family of quantum stabilizer codes from the parity-check matrices of Reed-Muller codes by Theorem 2. Parity-check matrices of Reed-Muller codes are commutative by the $|u|u+v|$ construction. Permutation matrices that increase the quantum minimum distance by Theorem 5 are also investigated.

4.1 Properties of Classical Reed-Muller Codes

Reed-Muller codes are weakly self-dual codes and have simple but good structure properties [16]. A Reed-Muller code with two parameters r, m is denoted by $RM(r, m)$, $0 \leq r \leq m$. This code is of length 2^m and r is called its order. Consider the following $(m+1)$ 2^m-tuples

$$
\begin{array}{rccccccccccccccccccccc}
\mathbf{1} & = & (& 1 & 1 & 1 & 1 & \cdots & 1 & 1 & 1 & 1 & 1 & 1 & 1 & 1 & \cdots & 1 & 1 & 1 & 1 &), \\
v_1 & = & (& 0 & 1 & 0 & 1 & \cdots & 0 & 1 & 0 & 1 & 0 & 1 & 0 & 1 & \cdots & 0 & 1 & 0 & 1 &), \\
v_2 & = & (& 0 & 0 & 1 & 1 & \cdots & 0 & 0 & 1 & 1 & 0 & 0 & 1 & 1 & \cdots & 0 & 0 & 1 & 1 &), \\
 & \vdots & & & & & \vdots & \ddots & \vdots & & & & & & & \vdots & \ddots & \vdots & & & & \\
v_m & = & (& 0 & 0 & 0 & 0 & \cdots & 0 & 0 & 0 & 0 & 1 & 1 & 1 & 1 & \cdots & 1 & 1 & 1 & 1 &).
\end{array}
$$

Then $RM(r,m)$ is generated by

$$
\begin{aligned}
&(\text{degree } 0)\ \mathbf{1},\\
&(\text{degree } 1)\ v_1,\ldots,v_m,\\
&(\text{degree } 2)\ v_1v_2,\ldots,v_{m-1}v_m,\\
&\qquad\vdots\\
&(\text{degree } r)\ v_1v_2\cdots v_r,\ldots,v_{m-r+1}v_{m-r+2}\cdots v_m,
\end{aligned}
$$

where the product of the v_i's means the bitwise AND of the v_i's and the degree means the number of v_i's appearing in the product. There are several properties of $RM(r,m)$ which can be derived directly from its construction [16]. The dimension of $RM(r,m)$ is

$$k = \sum_{i=0}^{r} \binom{m}{i}$$

and the minimum distance of $RM(r,m)$ is

$$d = 2^{m-r}.$$

The dual code of $RM(r,m)$ is

$$RM(m-r-1,m)$$

for $0 \le r \le m$, where $RM(-1,m) \triangleq \{\mathbf{0}\}$. Let $G_{(r,m)}$ denote a generator matrix of $RM(r,m)$. Reed-Muller code $RM(r,m+1)$ can be obtained from $RM(r,m)$ and $RM(r-1,m)$ by using the $|u|u+v|$ construction. A generator matrix of $RM(r,m+1)$ is

$$G_{(r,m+1)} = \begin{pmatrix} G_{(r,m)} & G_{(r,m)} \\ O & G_{(r-1,m)} \end{pmatrix}. \tag{25}$$

Since $RM(m-r-1,m)$ is the dual code of $RM(r,m)$, a parity-check matrix of $RM(r,m)$ is $G_{(m-r-1,m)}$ and

$$G_{(r,m)}G^T_{(m-r-1,m)} = O.$$

For convenience, the orthogonality of Reed-Muller codes can be remarked in the following lemma.

Lemma 6. For $r+s \le m-1$ and $m \ge 1$, $G_{(r,m)}$ and $G_{(s,m)}$ are orthogonal.

Next we will consider the relation between the commutativity of $G_{(r,m)}$ and the parameters r,m. We first consider the case when the permutation matrix P is an identity matrix I in (7). It is trivial that $G_{(0,m)}$ is commutative for all $m \ge 1$ since it is an all 1 vector. In general, we have the following lemma.

Lemma 7. For $r \le \lfloor \frac{m}{2} \rfloor$ and $m \ge 1$, $G_{(r,m+1)}$ is commutative.

Proof. By (25), we have

$$G_{(r,m+1)} = \begin{pmatrix} G_{(r,m)} & G_{(r,m)} \\ O & G_{(r-1,m)} \end{pmatrix}.$$

Since $r + (r-1) \leqslant m-1$, by Lemma 6, we have

$$G_{(r,m)}G^T_{(r-1,m)} = O.$$

Then the commutativity of $G(r, m+1)$ can be verified as

$$\begin{aligned} G_{(r,m+1)}\Lambda G^T_{(r,m+1)} &= \begin{pmatrix} G_{(r,m)} & G_{(r,m)} \\ O & G_{(r-1,m)} \end{pmatrix} \begin{pmatrix} O & I \\ I & O \end{pmatrix} \begin{pmatrix} G^T_{(r,m)} & O \\ G^T_{(r,m)} & G^T_{(r-1,m)} \end{pmatrix} \\ &= \begin{pmatrix} G_{(r,m)} & G_{(r,m)} \\ O & G_{(r-1,m)} \end{pmatrix} \begin{pmatrix} G^T_{(r,m)} & G^T_{(r-1,m-1)} \\ G^T_{(r,m)} & O \end{pmatrix} \\ &= \begin{pmatrix} G_{(r,m)}G^T_{(r,m)} + G_{(r,m)}G^T_{(r,m)} & G_{(r,m)}G^T_{(r-1,m)} \\ G_{(r-1,m)}G^T_{(r,m)} & O \end{pmatrix} \\ &= \ O. \end{aligned}$$

□

4.2 Quantum Reed-Muller Codes from Parity-Check Matrices

Now we will present a class of stabilizer codes derived from Reed-Muller codes by Theorem 2.

Let $m \geq 2r$ and let $H = G_{(r,m+1)}$ be a check matrix of a stabilizer group S. Then the stabilizer code $\mathcal{C}(\mathcal{S})$ is a quantum code of length $n = 2^m$ and dimension

$$k = 2^m - \sum_{i=0}^{r} \binom{m+1}{i}.$$

The classical minimum distance of the parity-check matrix $G_{(r,m+1)}$ is

$$d' = 2^{(m+1)-((m+1)-r-1)} = 2^{r+1}.$$

Thus the quantum error-correcting capability t of $\mathcal{C}(\mathcal{S})$ is lower bound by

$$t' = \lfloor \frac{d'-1}{4} \rfloor = 2^{r-1} - 1, \tag{26}$$

by Theorem 2. Therefore, this quantum code $\mathcal{C}(\mathcal{S})$ is able to correct at least $(2^{r-1}-1)$ qubit errors provided that $r \geq 1$. The quantum minimum distance d of $\mathcal{C}(\mathcal{S})$ is lower-bounded by $2t'+1 = 2^r - 1$. On the other hand, the symplectic dual $\bar{\mathcal{S}}^\perp$ has a generator matrix $G = G_{(m-r,m+1)}\Lambda$ which generates the same code as the generator matrix $G_{(m-r,m+1)}$ and its generalized Hamming weight is 2^r.

We have the following theorem.

Theorem 8. The parity-check matrix of a classical Reed-Muller code $RM(r, m+1)$ in (25) with $m \geq 2r$ and $r \geq 1$ is a check matrix of a $[[2^m, 2^m - \sum_{i=0}^{r} \binom{m+1}{i}, 2^r]]$ quantum stabilizer code.

Since the quantum error correcting capability $t = 2^{r-1} - 1$ equals to the lower bound $t' = 2^{r-1} - 1$ by Theorem 2, this quantum code will have additional correctable error operators of weight $> t$.

Since Reed-Muller codes $RM(r, m)$ with $2r + 1 \leqslant m$ are weakly self-dual codes, by Lemma 6, we can use them to construct CSS codes. Take $C_1 = RM(r_1, m)$ with minimum distance 2^{m-r_1}. Then choose $C_2 = RM(r_2, m)$, a subcode of C_1, with $r_2 < r_1$. The dual code of C_2 is $C_2^\perp = RM(m - r_2 - 1, m)$ with minimum distance $2^{m-m-r_2-1} = 2^{r_2+1}$. By CSS construction, we obtain a quantum code with parameters $[[2^m, \sum_{i=r_2+1}^{r_1} \binom{m}{i}, \geq \min\{2^{m-r_1}, 2^{r_2+1}\}]]$. For the best efficiency, we take $r_2 + 1 = m - r_1$. Let $r = r_2 + 1$. Then $2r \leq r_2 + r_1 + 1 = m$. We now construct a CSS code with parameters

$$[[2^m, 2^m - 2\sum_{i=0}^{r-1} \binom{m}{i}, 2^r]]. \tag{27}$$

Comparing the dimension of a CSS code in (27) with that of a quantum code in Theorem 8, both having the same length 2^m and the same minimum distance 2^r,

$$(2^m - 2\sum_{i=0}^{r-1} \binom{m}{i}) - (2^m - \sum_{i=0}^{r} \binom{m+1}{i}) = \binom{m}{r},$$

we find that the CSS construction has a higher efficiency. However, the construction in Theorem 8 gives us additional correctable error operators of weight $> t = 2^{r-1} - 1$. In Table 1, we list the number of additional correctable error operators for the stabilizer codes constructed by Theorem 2 from Reed-Muller codes with parameters $(m, r) = (5, 2), (6, 3), (7, 3)$.

Table 1: A list of numbers of additional correctable error operators for the stabilizer codes constructed by Theorem 2 from Reed-Muller codes with parameters $(m, r) = (5, 2), (6, 3), (7.3)$.

$n = 2^m$	32	64	128
t	1	3	3
# of additional correctable error operators	1984	5.99E+09	3.87E+11
# of original correctable error operators	97	1.14E+06	9.29E+06
# additional/ # original	20.45	5.24E+03	4.16E+04
m	5	6	7
r	2	3	3
dimension deficit $\binom{m}{r}$ relative to the CSS code	10	20	35

On the other hand, when comparing the efficiency of the $[[2^m, 2^m - \sum_{i=0}^{r-1} \binom{m+1}{i}, 2^{r-1}]]$ stabilizer code constructed by Theorem 2 from a Reed-Muller code with that of the $[[2^m, 2^m - 2\sum_{i=0}^{r-1} \binom{m}{i}, 2^r]]$ CSS code, the former code has a surplus $\binom{m}{i-1}$ in dimension, while the minimum distance of the former quantum code is only half of that of the latter CSS code. However, the former code has a lot of additional correctable error operators which will strengthen the error performance of the former code.

4.3 Permutations Which Increase the Minimum Distance

We find that if we multiply $G_{(1,m+1)}$ by the permutation matrix $P' = \begin{pmatrix} I & O \\ O & P \end{pmatrix}$ with P being the permutation matrix used in [10], a stabilizer group $\mathcal{S}$ with a check matrix $H = G_{(1,m+1)}P'$ will give a quantum stabilizer code $\mathcal{C}(\mathcal{S})$ with parameters $[[2^m, 2^m - m - 2, 3]]$, which are the same as those constructed in [10]. For example, when $m = 3$,

$$P = \begin{pmatrix} 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 \\ 0 & 0 & 0 & 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \end{pmatrix}.$$

There are many other permutation matrices that will work by Theorem 10 in [15], which means that a column permutation on a parity-check matrix may give a stabilizer code $\mathcal{C}(\mathcal{S})$ with higher quantum error-correcting capability. However, it is in general hard to find such a permutation matrix that the commutative condition still holds after the column permutation of the parity-check matrix.

We now investigate the effect of permutation matrices on generator matrices of Reed-Muller codes.

Theorem 9. Let $P' = \begin{pmatrix} I & O \\ O & P \end{pmatrix}$, where P is a permutation matrix such that the assumptions (9), (10), and (11) in Theorem 5 hold with $\mathcal{C}_1 = RM(m-r-1, m)$, $\mathcal{C}_2 = RM(m-r, m)$ and $d_1 = 2^{r+1}$, $d_2 = 2^r$. Then for $m \geq 2r$ and $r \geq 1$, the quantum stabilizer code $\mathcal{C}(\mathcal{S})$ with a check matrix $H = G_{(r,m+1)}P'$ will have parameters $[[2^m, 2^m - \sum_{i=0}^{r} \binom{m+1}{i}, \geq 2^r + 2^{r-1}]]$. In addition, $\mathcal{C}(\mathcal{S})$ will have additional correctable error operators if $r \geq 3$.

Proof. By Theorem 5, the minimum distance of $\mathcal{C}(\mathcal{S})$ is at least

$$\min\{d_1, \lceil \frac{3d_2}{2} \rceil\} = \min\{2^{r+1}, \lceil \frac{3 \times 2^r}{2} \rceil\} = 2^r + 2^{r-1}.$$

Note that the classical minimum distance of the parity-check matrix $H = G_{(r,m+1)}P'$ remains unchanged after a column permutation. By (26), $t' = 2^{r-1} - 1$. For $d = 2^r + 2^{r-1}$, the error-correcting capability of the quantum code $\mathcal{C}(\mathcal{S})$ is $t = \lfloor \frac{d-1}{2} \rfloor = \frac{3}{2}2^{r-1} - 1$. Then we have $2t' - t = 2^{r-2} - 1 > 0$ if $r \geq 3$. Thus by Theorem 3, the quantum code $\mathcal{C}(\mathcal{S})$ will have additional correctable error operators of weight $> t = \frac{3}{2}2^{r-1} - 1$ if $r \geq 3$. $\square$

In [19], Steane gave a class of quantum Reed-Muller codes with parameters $[[2^m, 2^m - \sum_{i=0}^{r} \binom{m+1}{i}, \geq 2^r + 2^{r-1}]]$ as given by Theorem 1. If there exists a permutation matrix P' satisfying the assumptions in Theorem 9, a stabilizer group $\mathcal{S}$ with a check matrix $H =$

$G_{(r,m+1)}P'$, $r \geq 1$, will give a quantum stabilizer code $\mathcal{C}(\mathcal{S})$ having the same parameters as those in [19] but having additional correctable error operators.

We now give an effective permutation matrix for $G_{(1,m)}$. Let

$$T = \begin{bmatrix} I_{\frac{n}{2}} \otimes \begin{bmatrix} 1 & 0 \end{bmatrix} \\ I_{\frac{n}{2}} \otimes \begin{bmatrix} 0 & 1 \end{bmatrix} \end{bmatrix},$$

and

$$Q = \begin{bmatrix} I_{\frac{n}{2}} & O \\ O & I_{\frac{n}{4}} \otimes \begin{bmatrix} 0 & 1 \\ 1 & 0 \end{bmatrix} \end{bmatrix},$$

where $n = 2^m$. For example, when $n = 2^3 = 8$,

$$T = \begin{pmatrix} 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 \end{pmatrix},$$

$$Q = \begin{pmatrix} 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 \\ 0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 \end{pmatrix}.$$

It can be verified that $v_iT = v_{i+1}$ for $1 \leq i \leq (m-1)$ and $v_mT = v_1$. Thus

$$P = TQ$$

is a permutation matrix such that $v_iP = v_{i+1}$ for $1 \leq i \leq (m-1)$ and $v_mP = v_1 + v_m$.

Theorem 10. The permutation matrix $P = TQ$ is a permutation matrix such that the assumptions (9), (10), and (11) in Theorem 5 hold with $\mathcal{C}_1 = RM(m-2, m)$, $\mathcal{C}_2 = RM(m-1, m)$ and $d_1 = 4, d_2 = 2$ for $m \geq 2$. Then a quantum stabilizer code $\mathcal{C}(\mathcal{S})$ with a check matrix $H = G_{(1,m+1)}P'$ will have parameters $[[2^m, 2^m - m - 2, \geq 3]]$.

Proof. $H_1 = G_{(1,m)}$ and $H_2 = G_{(0,m)}$ are parity-check matrices of $\mathcal{C}_1 = RM(m-2, m)$ and $\mathcal{C}_2 = RM(m-1, m)$, respectively. It can be verified that $H_1PH_1^T = H_1P^TH_1^T$ and $H_1PH_2^T = O$. Denote $v_iP \triangleq v_i'$ for convenience. It is obvious that $(v_{i_1} \cdots v_{i_l})P = v_{i_1}' \cdots v_{i_l}'$ for any l. Since $\mathcal{C}_2 = RM(m-1, m)$ is generated by

$$\mathbf{1}, v_1, \ldots, v_m, v_1v_2, \ldots, v_{m-1}v_m, \ldots, v_1v_2 \cdots v_{m-1}, \ldots, v_2v_3 \cdots v_m,$$

$\mathcal{C}_2P = RM(m-1,m)P$ is generated by

$$\mathbf{1}P, v_1P, \ldots, v_mP, (v_1v_2)P, \ldots, (v_{m-1}v_m)P, \ldots, (v_1v_2\cdots v_{m-1})P, \ldots, (v_2v_3\cdots v_m)P$$

or $\mathbf{1}, v_2, \ldots, v_m, v_1{+}v_m, v_2v_3, \ldots, v_mv_1{+}v_m, \ldots, (v_2v_3\cdots v_m), \ldots, (v_3v_4\cdots v_mv_1){+}(v_3v_4\cdots v_m)$. It can be easily verified that $\mathcal{C}_2P = \mathcal{C}_2$.Similarly, we have $\mathcal{C}_1P = \mathcal{C}_1$. Two generator matrices of $\mathcal{C}_1 = RM(m-2,m)$ and $\mathcal{C}_2 = RM(m-1,m)$ are $G_1 = G_{(m-2,m)}$ and $G_2 = \begin{bmatrix} G_3 \\ G_1 \end{bmatrix} = G_{(m-1,m)}$, respectively. The row vectors of G_3 are $v_1v_2\cdots v_{m-1}$, …, $v_2v_3\cdots v_m$, the m generators of degree $m-1$. For convenience, we denote $v_{i_1}\cdots v_{i_{m-1}} \triangleq w_j$ if j is not equal to any i_l, $1 \le l \le m-1$. Then the row vectors of G_3 are $w_m, w_{m-1}, \ldots, w_2, w_1$ and the row vectors of G_3P are $w_mP, w_{m-1}P, \ldots, w_2P, w_1P$ with

$$\begin{aligned}
w_mP &= (v_1v_2\cdots v_{m-1})P = v_2v_3\cdots v_m = w_1, \\
w_{m-1}P &= v_2v_3\cdots v_{m-1}v_m + v_2v_3\cdots v_{m-1}v_1 = w_1 + w_m \\
w_{m-2}P &= v_2\cdots v_{m-2}v_m + v_2\cdots v_{m-2}v_mv_1 = v_2\cdots v_{m-2}v_m + w_{m-1} \\
&\vdots \\
w_2P &= v_2v_4\cdots v_{m-1}v_mv_m + v_2v_4\cdots v_mv_1 = v_2v_4\cdots v_m + w_3, \\
w_1P &= v_3v_4\cdots v_{m-1}v_mv_m + v_3v_4\cdots v_mv_1 = v_3v_4\cdots v_m + w_2.
\end{aligned}$$

If $uG_3P = uG_3$ for some binary $m-$tuple $u = (a_1, \ldots, a_m)$,

$$\sum_{i=1}^{m} a_iw_i = \sum_{i=1}^{m} a_iw_iP.$$

It can be verified that the above equation holds only if $a_1 = a_2 = \ldots = a_m = 0$, that is, u is a zero tuple. Therefore, $uG_3P \neq uG_3$ for any nonzero $(k_2 - k_1)-$tuple u. By Theorem 9, we have a $[[2^m, 2^m - m - 2, \geq 3]]$ quantum stabilizer code $\mathcal{C}(\mathcal{S})$ with a check matrix $H = G_{(1,m+1)}P'$ for $m \geqslant 2$. □

There are other permutation matrices which will work by similar proofs.

For a general Reed-Muller code $RM(r,m)$ with minimum distance $d' = 2^{m-r}$, $m \geq 2r$, we have the following conjecture.

Conjecture 11. Either $P = T$ or $P = TQ$ is a permutation matrix satisfying the assumptions in Theorem 9 for all r, m with $m \geq 2r$. □

5 Quantum Cyclic Codes

5.1 Quantum Circulant Codes

Motivated by the five-qubit code in Eq. (2), we use Construction II in Subsection 3.2 with a check matrix $H = [H_X|H_Z] = [G_1|G_2]$, where G_1, G_2 are generator matrices of two classical cyclic codes $\mathcal{C}_1, \mathcal{C}_2$, respectively. This method is called the circulant construction and the generated quantum codes are called quantum circulant codes.

We arbitrarily choose two binary polynomials $g_1(x), g_2(x)$ as generator polynomials of two classical cyclic codes $\mathcal{C}_1, \mathcal{C}_2$, respectively. Then they cyclicly generate the matrices $H_X = G_1, H_Z = G_2$, respectively. If H is commutative, we then justify the rank of H by transforming H into the row-reduced-echelon form. The minimum distances of these quantum codes are determined by computer search and for small n, many good quantum circulant codes are found by this method and the quantum circulant codes with parameters achieving the upper bound in Table III in [15] are listed in Table 2. It is conjectured that most of the best quantum codes can be obtained by the circulant construction. However, the minimum distance is hard to decide for large n for the extremely high computing complexity.

Table 2: Some extremal quantum circulant codes.

$n\diagdown d\backslash k$	0	1	2	3	4	5	6	7	8
5	3	3							
6	4		2	2	2				
7	3	3		2	2				
8	4	3			2	2	2		
9	4	3	3	3			2		
10	4	4				2	2		2
12	6		4	4				2	2
13	5	5							
14	6	5	5	4	4			3	3
15	6	5	5	5	4	4	4	3	3
16	6	6				4			
17	7	7							4
18			6		5				
19		7							

5.2 Quantum Quadrature-Residue Codes

Another interesting fact of the five-qubit code is that the binary bit patterns of the generator polynomials $g_1(x), g_2(x)$ are the *indicator vectors* of the quadratic-residues mod 5 and the non-residues, respectively. Inspired by this fact, a suggestion for any prime p of the form $8m + 5$ is given in [11] without a proof though there is no classical binary quadratic-residue code for theses p's. In Subsubsection 5.2.1, we first introduce the basics of quadratic residues (please refer to [16] for a detailed discussion) and then give several quantum quadratic-residue codes by the CSS construction for prime numbers of the form $p = 8m \pm 1$. We then use the circulant construction with the two indicator vectors of the quadratic-residues and the non-residues mod p for prime numbers p of the form $p = 4j + 1$ in Subsubsection 5.2.2. The minimum distance of the generated quantum codes will be calculated by computer search.

5.2.1 Binary Quadrature-Residue Codes and Their Applications

Let p be an odd prime. For a nonzero j, $1 \le j \le p-1$, if $j = l^2 \mod p$ for some l, we say that j is a quadratic-residue mod p, otherwise j is called a non-residue. In particular, 0 is neither a residue nor a non-residue. There are $\frac{1}{2}(p-1)$ quadratic-residues and $\frac{1}{2}(p-1)$ non-residues mod p. Let Q denote the set of quadratic residues mod p and N denote the set of non-residues. If ρ is a primitive element of the field $GF(p)$, then $\rho^j \in Q$ if and only if j is even. Thus Q is a cyclic group generated by ρ^2. It can be verified that Q is a disjoint union of cyclotomic cosets mod p. Let

$$q(x) = \prod_{r \in Q}(x - \alpha^r), \quad n(x) = \prod_{n \in N}(x - \alpha^n),$$

where α is a primitive p-th root of unity. Then $x^p - 1 = (x-1)q(x)n(x)$. The quadratic-residue (QR) codes $\mathcal{Q}, \bar{\mathcal{Q}}, \mathcal{N}, \bar{\mathcal{N}}$ are cyclic codes with generator polynomials $q(x), (x-1)q(x), n(x), (x-1)n(x)$, respectively. The dimensions of $\mathcal{Q}, \mathcal{N}$ are both $\frac{1}{2}(p+1)$ and the dimensions of $\bar{\mathcal{Q}}, \bar{\mathcal{N}}$ are both $\frac{1}{2}(p-1)$. It is clear that $\mathcal{Q} \supseteq \bar{\mathcal{Q}}, \mathcal{N} \supseteq \bar{\mathcal{N}}$.

A binary polynomial $E(x)$ in the quotient ring $R_p = GF(2)[x]/(x^p - 1)$ is an idempotent if $E(x) = E(x)^2 = E(x^2) \mod x^p - 1$. A binary cyclic code $\mathcal{C} = \langle g(x) \rangle$ of length p contains a unique idempotent $E(x)$ such that $\mathcal{C} = \langle E(x) \rangle$. Of course, $E(x) = p(x)g(x)$ for certain $p(x)$.

Consider a prime p such that $2 \in Q$. If $p = 4j - 1$, the α can be chosen such that the idempotents of $\mathcal{Q}, \bar{\mathcal{Q}}, \mathcal{N}, \bar{\mathcal{N}}$ are

$$E_q(x) = \sum_{r \in Q} x^r, F_q(x) = 1 + \sum_{n \in N} x^n, E_n(x) = \sum_{n \in N} x^n, F_n(x) = 1 + \sum_{r \in Q} x^r.$$

In this case, $\mathcal{Q}^\perp = \bar{\mathcal{Q}}$ and $\mathcal{N}^\perp = \bar{\mathcal{N}}$. If $p = 4j + 1$, the α can be chosen such that the idempotents of $\mathcal{Q}, \bar{\mathcal{Q}}, \mathcal{N}, \bar{\mathcal{N}}$ are

$$E_q(x) = 1 + \sum_{r \in Q} x^r, F_q(x) = \sum_{n \in N} x^n, E_n(x) = 1 + \sum_{n \in N} x^n, F_n(x) = \sum_{r \in Q} x^r.$$

In this case, $\mathcal{Q}^\perp = \bar{\mathcal{N}}$ and $\mathcal{N}^\perp = \bar{\mathcal{Q}}$.

If $F_q(x) = \sum_{i=0}^{p-1} f_i x^i$, then a generator matrix of $\bar{\mathcal{Q}}$ is

$$\bar{G} = \begin{bmatrix} f_0 & f_1 & \dots & f_{p-1} \\ f_{p-1} & f_0 & \dots & f_{p-2} \\ \vdots & \vdots & \ddots & \vdots \\ f_1 & f_2 & \dots & f_0 \end{bmatrix}$$

and a generator for $\mathcal{Q}$ is

$$\begin{bmatrix} \bar{G} \\ 11\dots1 \end{bmatrix}.$$

Similar results can be obtained for $\mathcal{N}$ and $\bar{\mathcal{N}}$.

It is obvious that the above dual pairs can be used in the CSS construction. Taking $\mathcal{C}_1 = \mathcal{Q}, \mathcal{C}_2 = \bar{\mathcal{Q}}$ or $\mathcal{C}_1 = \mathcal{N}, \mathcal{C}_2 = \bar{\mathcal{N}}$ if $p = 4j - 1$, and $\mathcal{C}_1 = \mathcal{Q}, \mathcal{C}_2 = \bar{\mathcal{N}}$ or $\mathcal{C}_1 = \mathcal{N}, \mathcal{C}_2 = \bar{\mathcal{Q}}$ if $p = 4j + 1$, we can obtain a $[[p, 1, d]]$ quantum code for certain d in both cases. By Theorem 1 and Theorem 23 in Ch.16 in [16], we have the following theorem similar to Theorem 40 and Theorem 41 in [20] but of binary case.

Theorem 12. *If $p = 8m \pm 1$, then there exists a $[[p, 1, d]]$ CSS code with $d \geq \sqrt{p}$. If $p = 4j - 1$, we can strengthen the bound to $d^2 - d + 1 \geq p$.*

By collecting the minimum distance of various classical binary quadrature-residue codes in [21, 22, 23], we obtain Table 3.

Table 3: Parameters of several $[[p, 1, d]]$ CSS codes from classical binary quadrature-residue codes.

p	7	17	23	31	41	47	71
d	3	5	7	7	9	11	11

p	73	79	89	97	103	113	137
d	13	15	17	15	19	15	21

Quadrature-residue codes can be extended by adding an overall parity-check bit so that the extended quadrature-residue codes $\hat{\mathcal{Q}}$ and $\hat{\mathcal{N}}$ have the following relations:

$$\hat{\mathcal{Q}}^{\perp} = \hat{\mathcal{Q}} \text{ and } \hat{\mathcal{N}}^{\perp} = \hat{\mathcal{N}}, \text{ if } p = 4j - 1$$

and

$$\hat{\mathcal{Q}}^{\perp} = \hat{\mathcal{N}}, \text{ if } p = 4j + 1.$$

Similarly, the extended quadrature-residue codes can be used in the CSS construction and we have the following theorem by Theorem 8 in Ch.16 in [16].

Theorem 13. *If $p = 8m \pm 1$, then there exists a $[[p + 1, 0, d]]$ CSS code for certain d. If $p = 4j - 1$, $d \equiv 0$ or $3 \bmod 4$. If $p = 4j + 1$, d is even.*

With Table 1(a) in [24], we have Table 4.

The parameters in Table 3 are related to those in Table 4 by Theorem 6 in [15] in spite of the fact that the entries are fewer in Table 3.

5.2.2 Quadrature Residues Related Quantum Circulant Codes

Let $g_1(x) = \sum_{i=0}^{p-1} a_i x^i = \sum_{r \in Q} x^r$ and $g_2(x) = \sum_{j=0}^{p-1} b_j x^j = \sum_{n \in N} x^n$ for certain prime number p. These two binary polynomials are corresponding to the indicator vectors of the quadratic-residues and the non-residues, respectively. For example, when $p = 13$,

$$g_1(x) = x + x^3 + x^4 + x^9 + x^{10} + x^{12}, \; g_2(x) = x^2 + x^5 + x^6 + x^7 + x^8 + x^{11}$$

Table 4: Parameters of several $[[p+1, 0, d]]$ CSS codes from classical binary extended quadrature-residue codes.

p	8	18	24	32	42	48	72	74	80	90	98	104	114	128	138	152	168	192	194	200	
d	4	6	8	8	10	12	12	14	16	18	16	20	16	20	22	20	24	28	28	32	

and the two corresponding indicator vectors are

$$0101100001101\ ,\ 0010011110010,$$

respectively. We begin with the following lemma to discuss our method for $p = 4j+1$.

Lemma 14. For $p = 4j+1$, the matrices

$$H_X = \begin{bmatrix} a_0 & a_1 & \dots & a_{p-1} \\ a_{p-1} & a_0 & \dots & a_{p-2} \\ \vdots & \vdots & \ddots & \vdots \\ a_1 & a_2 & \dots & a_0 \end{bmatrix}$$

and

$$H_Z = \begin{bmatrix} b_0 & b_1 & \dots & b_{p-1} \\ b_{p-1} & b_0 & \dots & b_{p-2} \\ \vdots & \vdots & \ddots & \vdots \\ b_1 & b_2 & \dots & b_0 \end{bmatrix}$$

are symmetric.

Proof. We have $a_j = 1$ if $j \in Q$ and $a_j = 0$, else, by the choice of $g_1(x)$. For $p = 4j+1$, $-1 \in Q$ and we have $a_j = a_{-j} = a_{p-j}$. The element in the i-th row and the j-th column of H_x is $(H_X)_{ij} = a_{j-i \mod p}$. Since $(H_X)_{ij} = a_{j-i \mod p} = a_{-(j-i) \mod p} = a_{i-j \mod p} = (H_X)_{ji}$, the matrix H_X is symmetric. Similar reason holds for H_Z. $\square$

Theorem 15. For $p = 4j+1$, the matrix $H = [H_X|H_Z]$ is commutative and has rank $p-1$. Then there is a $[[p, 1, d]]$ quantum stabilizer code for a certain d.

Proof. Let $H_Y = H_X + H_Z$. Equivalently, we consider a check matrix $[H_Y|H_Z]$ instead of $[H_X|H_Z]$. Note that the rank of the check matrix remains to be determined. Let J_p denote the $p \times p$ all-1 matrix. It is obvious that

$$H_Y = \begin{bmatrix} 0 & 1 & 1 & \dots & 1 \\ 1 & 0 & 1 & \dots & 1 \\ 1 & 1 & 0 & \dots & 1 \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ 1 & 1 & 1 & \dots & 0 \end{bmatrix} = J_p - I_p.$$

Denote the i-th row vectors of H_Y and H_Z by α_i and β_i, respectively. Since α_i and β_i are the indicator vectors both with i right cyclic shifts, we have $\alpha_i \cdot \beta_i = 0$. Note that $\alpha_i + \alpha_j = 0\ldots010\ldots010\ldots0$ with two 1's at the i-th and the j-th positions. The commutative condition can be checked for any two rows as follows:

$$\begin{aligned}\alpha_i \cdot \beta_j + \alpha_j \cdot \beta_i &= (\alpha_i + \alpha_j) \cdot (\beta_i + \beta_j) \\ &= (0\ldots010\ldots010\ldots0) \cdot (\beta_i + \beta_j) \\ &= (H_Z)_{i,i} + (H_Z)_{j,i} + (H_Z)_{i,j} + (H_Z)_{j,j} \ .\end{aligned}$$

Since H_Z is symmetric by Lemma 14 and $(H_Z)_{i,i} = 0$ for all i by the construction, the commutative condition holds. For $H_Y = J_p - I_p$, the last row vector of H_Y can be obtained from the summation of all the other row vectors. Thus the rank of H_Y is $p-1$. Similarly, the ranks of H_X and H_Z are both $p-1$. Hence the rank of the check matrix H is $p-1$. Thus the quantum stabilizer code with a check matrix H has parameters $[[p, 1, d]]$ for a certain d. □

In [11], the quantum codes of $p = 8m+5$ is a special case of above theorem. It remained to determine the minimum distances of these codes. Parameters of several quantum codes from Theorem 15 are given in Table 5. The minimum distance of these codes is determined by computer search. Note that the minimum distance of the quantum codes in Table 5 with $p = 5, 13, 29$ achieves the upper bound in [15]. However, the minimum distance of a generic quantum code from Theorem 15 is not found for the extremely high computing complexity.

Table 5: Parameters of several $[[p, 1, d]]$ quantum codes from Theorem 15.

p	5	13	17	29
d	3	5	5	11

5.2.3 A Construction for Quantum Codes with $k = 1$

Inspired from the proof of the quantum quadratic residue codes, we give a construction of $[[n, 1]]$ quantum stabilizer codes in this subsubsection. Let $g = (a_0, a_1, \ldots, a_{n-1})$ be a vector of length n, odd or even, with $a_0 = 0$ and $a_i = a_{n-i} = a_{-i \bmod n}$ for $i = 1$ to $\frac{n-1}{2}$. We use $n \times n$ matrices H_X, H_Z for convenience of explanation. Let

$$H_X = \begin{bmatrix} 1 & 0 & \ldots & 0 & 1 \\ 0 & 1 & \ldots & 0 & 1 \\ \vdots & \vdots & \ddots & \vdots & \vdots \\ 0 & 0 & \ldots & 1 & 1 \\ 0 & 0 & \ldots & 0 & 0 \end{bmatrix} = \begin{bmatrix} & & 1 \\ & I_{n-1} & \vdots \\ & & 1 \\ 0 & \ldots & 0 \end{bmatrix}$$

with $(H_X)_{i,i} = (H_X)_{i,n-1} = 1$ for $0 \le i \le n-2$ and $(H_X)_{i,j} = 0$ otherwise.

Let $H_{Z(i,j)} = a_{(j+1) \mod n} + a_{(i-j) \mod n}$ for $0 \leq i, j \leq n-1$.That is

$$H_Z = \begin{bmatrix} a_1+a_0 & a_2+a_{n-1} & a_3+a_{n-2} & \dots & a_{n-1}+a_2 & a_1 \\ a_1+a_1 & a_2+a_0 & a_3+a_{n-1} & \dots & a_{n-1}+a_3 & a_2 \\ a_1+a_2 & a_2+a_1 & a_3+a_0 & \dots & a_{n-1}+a_4 & a_3 \\ \vdots & \vdots & \vdots & \dots & \vdots & \vdots \\ a_1+a_{n-2} & a_2+a_{n-3} & a_3+a_{n-4} & \dots & a_{n-1}+a_0 & a_{n-1} \\ a_1+a_{n-1} & a_2+a_{n-2} & a_3+a_{n-3} & \dots & a_{n-1}+a_1 & a_0 \end{bmatrix}$$

$$= \begin{bmatrix} a_1 & a_2+a_{n-1} & a_3+a_{n-2} & \dots & a_{n-1}+a_2 & a_1 \\ a_1+a_1 & a_2 & a_3+a_{n-1} & \dots & a_{n-1}+a_3 & a_2 \\ a_1+a_2 & a_2+a_1 & a_3 & \dots & a_{n-1}+a_4 & a_3 \\ \vdots & \vdots & \vdots & \dots & \vdots & \vdots \\ a_1+a_{n-2} & a_2+a_{n-3} & a_3+a_{n-4} & \dots & a_{n-1} & a_{n-1} \\ 0 & 0 & 0 & \dots & 0 & 0 \end{bmatrix}.$$

Then a check matrix $H = [H_X|H_Z]$ has rank $(n-1)$ and the commutative condition for H can be justified as follows:

$$\begin{aligned} \alpha_i \cdot \beta_j + \alpha_j \cdot \beta_i &= (\alpha_i + \alpha_j) \cdot (\beta_i + \beta_j) \\ &= (0\dots010\dots010\dots0) \cdot (\beta_i + \beta_j) \\ &= H_{Z(i,i)} + H_{Z(i,j)} + H_{Z(j,i)} + H_{Z(j,j)} \\ &= a_{i+1} + (a_{i-j \mod n} + a_{j+1}) + (a_{j-i \mod n} + a_{i+1}) + a_{j+1} \\ &= 0. \end{aligned}$$

We found that the quantum quadratic-residue code for $p = 8j+5$ in the last subsubsection can be constructed in this way with g being the indicator vector of the quadratic residues. Some quantum codes achieving the upper bound in [15] can be constructed similarly. For example, when $n = 17$, each of the following two vectors

$$0110100110010110, \quad 0100011111100010$$

(or their complementary vectors and no others) together with $a_0 = 0$ gives a $[[17, 1, 7]]$ code that achieves the upper bound in [15]. A $[[17, 1, 7]]$ quantum stabilizer code can be constructed by quantum BCH codes in [25, 26]. However, the above two vectors are found by computer search. It is difficult to determine a vector g and the minimum distance of the resulted quantum code efficiently.

6 Conclusion

In this paper, a simple stabilizer code construction was proposed based on syndrome assignment by classical parity-check matrices. The construction of quantum stabilizer codes can then be converted to the construction of classical binary linear block codes with commutative parity-check matrices. The asymptotic coding performance of this construction was shown to be promisingly comparable to that of the CSS construction.

Permutation matrices may help transform non-commutative parity-check matrices to commutative ones and/or increase the minimum distance of the constructed quantum codes. However, for a given parity-check matrix H, it remains open to find an effective permutation matrix P such that HP is commutative and/or corresponds to a code with greater minimum distance.

We have constructed a family of stabilizer codes from classical binary Reed-Muller codes with performance comparable to that of the CSS construction. We have also investigated sufficient conditions for permutation matrices to be able to increase the minimum distance of our constructed quantum Reed-Muller codes by half. We have also proposed a specific kind of effective permutations and showed that they meet the sufficient conditions for stabilizer codes constructed from the $RM(1, m)$ Reed-Muller codes. A conjecture of effective permutation matrices for general r, m with $m \geq 2r$ remains to be proved. It is believed that permutation of the columns of a parity-check matrix will play an important role in the construction of quantum stabilizer codes from classical parity-check matrices.

The quantum quadratic-residue codes are codes with large quantum minimum distance. However their quantum minimum distance is hard to determine as in the classical case. Perhaps techniques in [23] can be applied to the quantum case. How to determine the minimum distance of a long quantum code will be a key to find good codes.

References

[1] P. W. Shor, "Rapid communications," *Physical Review A*, vol. 52, no. 4, pp. 2493–2496, 1995.

[2] A. M. Steane, "Error correcting codes in quantum theory," *Physical Review Letter*, vol. 77, no. 5, pp. 793–797, 1996.

[3] ——, "Simple quantum error-correcting codes," *Physical Review A*, vol. 54, no. 6, pp. 4741–4751, 1996.

[4] A. Ekert and C. Macchiavello, "Quantum error-correction for communication," *Physical Review Letter*, vol. 77, no. 12, pp. 2585–2588, 1996.

[5] C. H. Bennett, D. P. DiVincenzo, J. A. Smolin, and W. K. Wootters, "Mixed state entanglement and quantum error correction," *Physical Review A*, vol. 54, no. 5, pp. 3824–3851, 1996. [Online]. Available: http://arxiv.org/abs/quant-ph/9604024

[6] E. Knill and R. Laflamme, "A theory of quantum error-correcting codes," *Physical Review A*, vol. 55, no. 2, pp. 900–911, 1997.

[7] R. Laflamme, C. Miquel, J. P. Paz, and W. H. Zurek, "Perfect quantum error correcting codes," *Physical Review Letter*, vol. 77, no. 1, pp. 198–201, 1996.

[8] A. R. Calderbank and P. W. Shor, “Good quantum error-correcting codes exist,” *Physical Review A*, vol. 54, no. 2, pp. 1098–1105, 1996. [Online]. Available: http://arxiv.org/abs/quant-ph/9512032

[9] A. M. Steane, “Multiple particle interference and quantum error correction,” *Proc. R. Soc. London A*, vol. 452, pp. 2551–2576, 1996. [Online]. Available: http://arxiv.org/abs/quant-ph/9601029

[10] D. Gottesman, “Class of quantum error-correcting codes saturating the quantum hamming bound,” *Physical Review A*, vol. 54, no. 3, pp. 1862–1868, 1996. [Online]. Available: http://arxiv.org/abs/quant-ph/9604038

[11] A. R. Calderbank, E. M. Rains, P. W. Shor, and N. J. A. Sloane, “Quantum error correction and orthogonal geometry,” *Physical Review Letter*, vol. 78, no. 3, pp. 405–408, 1997. [Online]. Available: http://arxiv.org/abs/quant-ph/9605005

[12] D. Gottesman, “Stabilizer codes and quantum error correction,” Ph.D. dissertation, California Institute of Technology, Pasadena, CA, 1997. [Online]. Available: http://arxiv.org/abs/quant-ph/9705052

[13] A. M. Steane, “Enlargement of Calderbank-Shor-Steane quantum codes,” *IEEE Trans. Inform. Theory*, vol. 45, no. 7, pp. 2492–2495, 1999. [Online]. Available: http://arxiv.org/abs/quant-ph/9802061

[14] M. A. Nielsen and I. L. Chuang, *Quantum Computation and Quantum Information.* Cambridge, UK: Cambirdge University Pressr, 2000.

[15] A. R. Calderbank, E. M. Rains, P. W. Shor, and N. J. A. Sloane, “Quantum error correction via codes over $GF(4)$,” *IEEE Trans. Inform. Theory*, vol. 44, no. 4, pp. 1369–1387, 1998. [Online]. Available: http://arxiv.org/abs/quant-ph/9608006

[16] F. J. MacWilliams and N. J. A. Sloane, *The Theory of Error-Correcting Codes.* Amsterdam, The Netherlands: North-Holland, 1977.

[17] J. H. van Lint, *Introduction to Coding Theory.* New York: Springer-Verlag, 1982.

[18] J. Preskill, “Advanced mathematical methods of physics - quantum computation and information,” *Physics*, vol. 229, 1998.

[19] A. M. Steane, “Quantum Reed-Ruller codes,” *IEEE Trans. Inform. Theory*, vol. 45, no. 5, pp. 1701–1703, 1999. [Online]. Available: http://arxiv.org/abs/arXiv:quant-ph/9608026

[20] A. Ketkar, A. Klappenecker, S. Kumar, and P. K. Sarvepalli, “Nonbinary stabilizer codes over finite fields,” *IEEE Trans. Inform. Theory*, vol. 52, no. 11, pp. 4892–4914, 2006.

[21] D. Coppersmith and G. Seroussi, “On the minimum distance of some quadratic residue codes,” *IEEE Trans. Inform. Theory*, vol. 30, no. 2, pp. 407–411, 1984.

[22] N. Boston, “The minimum distance of the binary $[137, 69]$ quadratic residue code,” *IEEE Trans. Inform. Theory*, vol. 45, no. 1, p. 282, 1999.

[23] T.-K. Truong, Y. Chang, and C.-D. Lee, “The weight distributions of some binary quadratic residue codes,” *IEEE Trans. Inform. Theory*, vol. 51, no. 5, pp. 1776–1782, 2005.

[24] M. Grassl, “On the minimum distance of some quadratic-residue codes,” in *Proc. IEEE ISIT '2000*, p. 253.

[25] M. Grassl and T. Beth, “Quantum BCH codes,” in *Proc. X. International Symposium on Theoretical Electrical Engineering*, Magdeburg, 1999, pp. 207–212. [Online]. Available: http://arxiv.org/abs/quant-ph/9910060

[26] S. A. Aly, A. Klappenecker, and P. K. Sarvepalli, “Primitive quantum BCH codes over finite fields,” in *Proc. IEEE ISIT '2006*, pp. 1105–1108. [Online]. Available: http://arxiv.org/abs/quant-ph/0501126